

Job Name

Purchaser

Submitted to

Unit Designation

Location

Engineer

Reference

Approval

Construction

Schedule #

| Specifications         |                                           |                                                                                                                                                                                      |                                   |
|------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Model                  | Indoor Unit Model Number (US Code)        |                                                                                                                                                                                      | AC009BNLDC/AA (CNH09LDB)          |
|                        | Outdoor Unit Model Number (US Code)       |                                                                                                                                                                                      | AC009BXADCH/AA (CXH09ADB)         |
| Performance            | Nominal Capacity                          | Cooling / Heating (Btu/h)                                                                                                                                                            | 9,000 / 12,000                    |
|                        | Capacity Range                            | Cooling (Btu/h)                                                                                                                                                                      | 3,000 - 13,000                    |
|                        |                                           | Heating (Btu/h)                                                                                                                                                                      | 2,900 - 16,000                    |
|                        | AHRI 210-240 2017 <sup>1</sup>            | SEER                                                                                                                                                                                 | 21.1                              |
|                        |                                           | EER                                                                                                                                                                                  | 14.0                              |
|                        |                                           | HSPF                                                                                                                                                                                 | 11.30                             |
|                        | AHRI 210-240 2023 <sup>2</sup>            | SEER2                                                                                                                                                                                | 21.8                              |
|                        |                                           | EER2                                                                                                                                                                                 | 14.0                              |
|                        |                                           | HSPF2                                                                                                                                                                                | 9.9                               |
| Power                  | Voltage                                   | ø V / Hz                                                                                                                                                                             | 1 / 208-230 / 60                  |
|                        | Working Voltage Range (VAC)               |                                                                                                                                                                                      | 187 - 253                         |
|                        | Operating Current<br>(min. / std. / max.) | Cooling (A)                                                                                                                                                                          | 1.2 / 3.3 / 5.9                   |
|                        |                                           | Heating (A)                                                                                                                                                                          | 1.1 / 4.7 / 9.0                   |
|                        | Max. Breaker                              | Amps                                                                                                                                                                                 | 15                                |
| Dimensions             | W X H X D (in.)                           | Indoor Unit                                                                                                                                                                          | 35 7/16 X 7 13/16 X 17 5/16       |
|                        |                                           | Outdoor Unit                                                                                                                                                                         | 31 1/8 X 21 9/16 X 11 1/4         |
|                        | Weight (lbs.)                             | Indoor Unit                                                                                                                                                                          | 41.7                              |
|                        |                                           | Outdoor Unit                                                                                                                                                                         | 74.3                              |
|                        | Duct Connections<br>(W X H)               | Supply (in.)                                                                                                                                                                         | 29 3/16 X 5 15/16                 |
| Sound Pressure Level   | Indoor Unit dB(A)                         | L / M / H                                                                                                                                                                            | 26 / 30 / 33                      |
|                        | Outdoor Unit dB(A)                        | Cooling / Heating (high)                                                                                                                                                             | 46 / 47                           |
| Operating Temperatures | Outdoor                                   | Cooling                                                                                                                                                                              | 23 ~ 122°F (-5 ~ 50°C)            |
|                        |                                           | Heating                                                                                                                                                                              | 0 ~ 122°F (-18 ~ 50°C) W/Baffle   |
|                        | Indoor                                    | Heating                                                                                                                                                                              | -13 ~ 75°F (-25 ~ 24°C)           |
|                        |                                           | Cooling                                                                                                                                                                              | 62 ~ 90°F (16 ~ 32°C)             |
|                        |                                           | Heating                                                                                                                                                                              | T ≤ 86°F (30°C)                   |
| Pipe Connections       | Indoor & Outdoor                          | High side                                                                                                                                                                            | 1/4"                              |
|                        |                                           | Low side                                                                                                                                                                             | 3/8"                              |
|                        | Maximum (ft.)                             |                                                                                                                                                                                      | 65.6                              |
|                        | Maximum Vertical Separation (ft.)         |                                                                                                                                                                                      | 49.2                              |
| Refrigerant            | Type                                      |                                                                                                                                                                                      | R410A                             |
|                        | Factory Charge                            | lbs.                                                                                                                                                                                 | 2.54                              |
|                        | Charged for                               |                                                                                                                                                                                      | 24.6 ft.                          |
| Compressor             | Manufacturer                              |                                                                                                                                                                                      | Samsung                           |
|                        | Type                                      |                                                                                                                                                                                      | Inverter Driven, Twin BLDC Rotary |
|                        | RLA                                       | Amps                                                                                                                                                                                 | 6                                 |
| Evaporator Fan         | Type                                      |                                                                                                                                                                                      | BLDC (1) With Sirocco Fan (2)     |
|                        | Air Volume                                | CFM (L/M/H)                                                                                                                                                                          | 194 / 230 / 283                   |
|                        | Output                                    | Watts                                                                                                                                                                                | 84                                |
|                        | External Static Pressure                  | Standard ("WC)                                                                                                                                                                       | 0.1                               |
|                        |                                           | Min. / Max. ("WC)                                                                                                                                                                    | 0.0 / 0.24                        |
| Condenser Fan          | Motor                                     |                                                                                                                                                                                      | BLDC With Axial Type Fan (1)      |
|                        | FLA / Watts / CFM (max.)                  |                                                                                                                                                                                      | 0.42A X 1 / 40W X 1 / 1,060 CFM   |
| Safety                 | Certifications                            | UL 60335-2-40                                                                                                                                                                        |                                   |
|                        | Devices                                   | PCB fuses, indoor unit terminal block thermal fuse, current transformer, over-voltage protection, crankcase heating, temperature limit protection logic, compressor overload sensing |                                   |



- General Information
- The outdoor unit shall supply power to indoor unit via 14 AWG X 3 power wire
  - High-voltage terminal block temperature sensor to disable unit in the event of power connection overheating
  - Integral condensate pump with maximum 29" lift from bottom of the unit with check valve and float switch that disables indoor should condensate overflow be detected.
  - Auto-restart after power loss
  - Soft-start compressor minimizing current inrush
  - All heat exchangers shall be mechanically bonded aluminum fin to copper tube
  - The condensing unit heat exchanger salt spray test method: ISO-9227 - the heat exchanger showed no unusual rust or corrosion development to 500 hours.
  - Base pan heater equipped as standard
- Option settings
- The outdoor unit shall have snow accumulation prevention option setting to prevent snow drifting against an idle outdoor unit.
  - Night-time Quiet Mode: reduction of operational sound during evening hours (*automatic or manual activation*).
  - Emergency Temperature Output (ETO) function: when indoor unit is in error status or when room temperature exceeds configurable temperature level, the system outputs a signal to an external source, e.g., backup system, building management system, alert device (ex: status light, warning lamp, buzzer).
  - System can be set up as heating/cooling, cooling only, or heating only via outdoor unit option setting.
  - Maximum Current Control configurable from 50% - 100% via outdoor unit, wired controller or central control

- Indoor Fan
- Indoor fan is sirocco type
  - Three fan speed settings and auto setting
  - Washable filter as standard

- Construction
- Outdoor unit shall be galvanized steel with a baked-on powder coated finish for durability
  - Indoor Unit: Insulated, galvanized steel.

- Controls
- Control wiring shall be 2 X 16 AWG wire
  - No additional interface modules/adapters are required when connecting to Samsung central control options.
  - The unit shall be operated via a wireless or wired remote control with DDC type signal
  - Dual set temperature support when connected to MWR-WG00UN Advanced Wired Controller or central control options.
  - Wired or wireless controllers must be purchased separately

- Refrigerant System
- The compressor shall be hermetically sealed, inverter-controlled BLDC rotary type.
  - Refrigerant flow shall be controlled by an electronic expansion valve at outdoor unit

Warranty

10 Years compressor, 10 years parts, 1 year limited labor when registered

ATTENTION

This air handling unit is intended for free-air discharge or for connection to a duct supplying only one room. Improper installation could contribute to the spread of smoke or flame in the event of a fire.

This publication reflects both the 1987 Appendix M metric (SEER) and the 2023 Appendix M1 metric (SEER2). Efficiency requirements are published at 10 C.F.R. 430.32(c). Please refer to [www.AHRInet.org](http://www.AHRInet.org) for more information about updated energy metrics.

<sup>1</sup>Performance data certified by AHRI to AHRI 210-240 (2017) with Addendum 1.  
<sup>2</sup>Performance data certified by AHRI to AHRI 210-240 (2023). Effective January 1st, 2023.




Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice. Refer to [www.AHRIdirectory.org](http://www.AHRIdirectory.org) for current reference numbers.

Select models are ENERGY STAR labeled. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps (excluding ductless systems) must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov).




Optional Accessories

|                                                                    |                          |            |
|--------------------------------------------------------------------|--------------------------|------------|
| Wired Controller                                                   | Advanced                 | MWR-WG00UN |
|                                                                    | Touchscreen              | MWR-SH11UN |
| Thermostat Adaptor (for connection to a standard 24VAC thermostat) |                          | MIM-A60UN  |
| Wireless Signal                                                    | Wireless Signal Receiver | MRK-A10N   |
| Control                                                            | Wireless Controller      | AR-EH04U   |
| Wi-Fi Adapter                                                      |                          | MIM-H05UN  |
| External Temperature Sensor                                        |                          | MRW-TA     |
| Filter Box                                                         |                          | FB-SLIM2   |
| External Contact Control                                           |                          | MIM-B14    |
| Wall Bracket (for outdoor unit)                                    |                          | CKN-250    |
| Wind Baffles                                                       | Front                    | WBF-3M     |
|                                                                    | Back                     | WBB-5M     |
| Hail Guard Kit (includes back and side guards)                     |                          | HGK-1      |
| Line Sets - insulated and flared, interconnect cables included     | 25' - ILS-2506           |            |
|                                                                    | 50' - ILS-5006           |            |

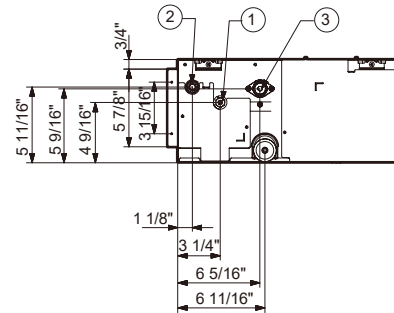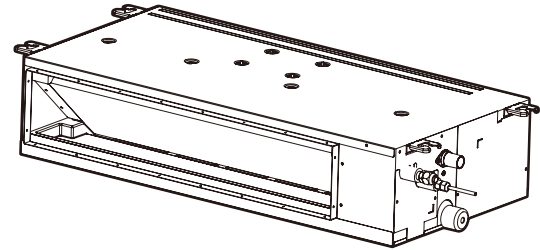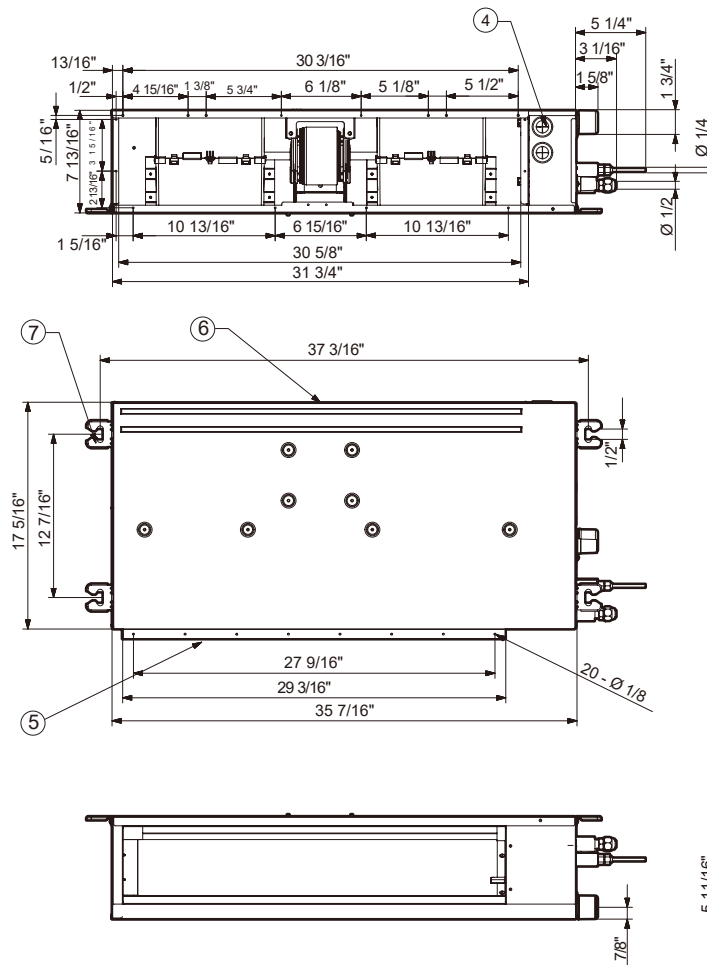

| No. | Name                          | Description     |
|-----|-------------------------------|-----------------|
| ①   | Refrigerant Liquid Pipe       | Ø 1/4"          |
| ②   | Refrigerant Gas Pipe          | Ø 3/8"          |
| ③   | Condensate Drain              | 3/4" (OD 1.05") |
| ④   | Power & Comm. Wiring Conduits | -               |
| ⑤   | Supply Air Flange             | -               |
| ⑥   | Return Air Flange             | -               |
| ⑦   | Hook                          | -               |

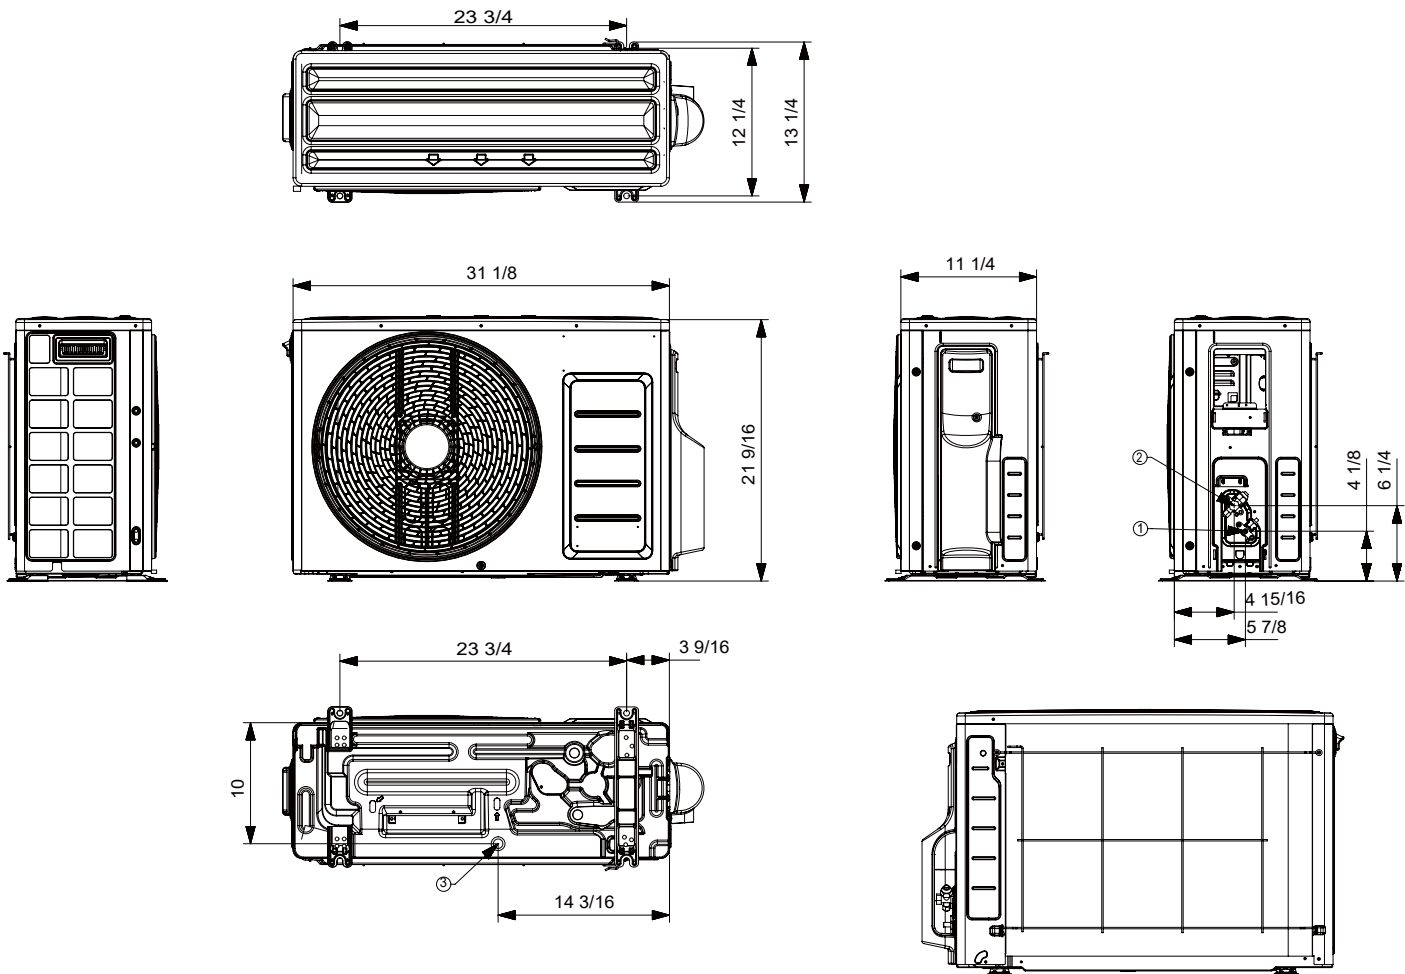

| No. | Name                    | Description                      |
|-----|-------------------------|----------------------------------|
| 1   | Refrigerant liquid pipe | Ø 1/4                            |
| 2   | Refrigerant gas pipe    | Ø 3/8                            |
| 3   | Drain hole              | Connect with provided drain plug |