


# Chamberlin Stainless Steel Braided All Metal Hose Assemblies

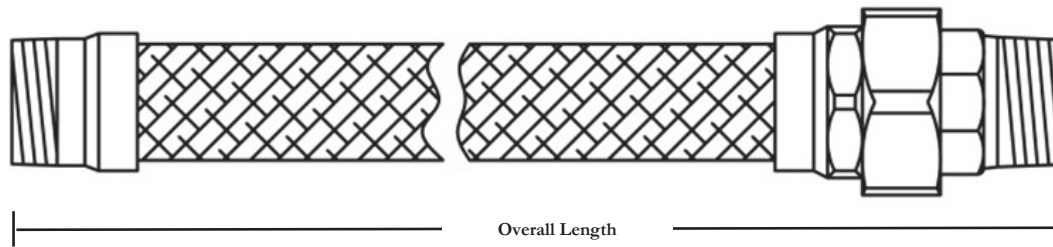

<b>Hose Sizes:</b>	<b>1-1/2" to 2"</b>
<b>Hose Lengths:</b>	<u>Standard:</u> 12", 18", 24", 36" <u>Custom:</u> Minimum length: 12" with 1" increments.
<b>Inner Tube:</b>	321L/316L Stainless Steel
<b>Outer Braid:</b>	304L Stainless Steel
<b>Fittings:</b>	Iron/Carbon Steel
<b>Fixed End Fittings:</b>	MNPT
<b>Union End Fittings:</b>	MNPT
<b>Working Pressure:</b>	300 psi
<b>Burst Pressure:</b>	1200 psi
<b>Minimum Bend Radius:</b>	1-1/2" - 11.75" 2" - 12.55"
<b>Temperature Rating:</b>	-20°F to 800°F

---

<b>Hose Sizes:</b>	<b>2-1/2"</b>
<b>Hose Lengths:</b>	<u>Standard:</u> 18", 24", 36" <u>Custom:</u> Minimum length: 18" with 1" increments.
<b>Inner Tube:</b>	T321L Stainless Steel
<b>Outer Braid:</b>	Series 300 Stainless Steel
<b>Fittings:</b>	Iron/Carbon Steel
<b>Fixed End Fittings:</b>	MNPT
<b>Union End Fittings:</b>	MNPT
<b>Working Pressure:</b>	300 psi
<b>Burst Pressure:</b>	1200 psi
<b>Minimum Bend Radius:</b>	16"
<b>Temperature Rating:</b>	-20°F to 800°F