## SAMSUNG

## SUBMITTAL PC4NUSKUN

Page 1 of 1


Samsung DVM S Series, 4-Way Cassette Fascia Panel (standard)

Job Name	Location _			
Purchaser	Engineer			
Submitted to	Reference	Approval	Construction	
Unit Designation	Schedule #			

## **Specifications**

- Fascia panel for Samsung 4-Way cassette indoor units (AM0\*\*FN4DCH/AA, AM0\*\*NN4DCH/AA, AC0\*\*JN4DCH/AA, AC0\*\*NN4DCH/AA)
- HIPS chassis certified to UL94 V0
  4 X motorized, auto swing louvers with
- Independent louver control capability (32° 65° louver control range)
- Built-in IR receiver for optional wireless control
- · Four LED lights to display power status, filter reminder, error status, defrost notification, and timer functions (where applicable)
- The panel shall include 1 X electrostatic, washable, pleated filters and all necessary mounting hardware as standard
- Louvers and panel display are powered and controlled by the indoor unit PCB
  Panel corners are removable to easily level unit and adjust height
- Dimensions (L X W X H): 37 3/8" X 37 3/8" X 1"
- · Weight: 13 lbs.



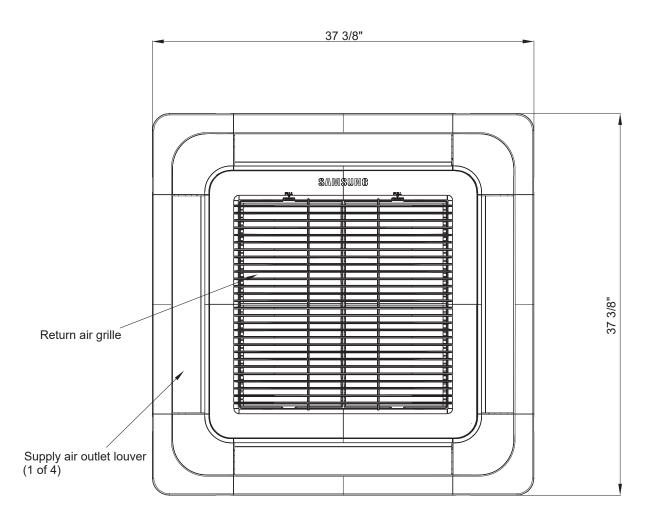

Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.