

# SAMSUNG

## Submittal Data

### AC036DNZDCG/AA (CNG36ZDD) / AC036DXADCG/AA (CXG36ADD)

#### Multi-Position Air Handler, Single Zone, Heat Pump, Split System (Standard)

Job Name: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Unit designation: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Reference \_\_\_\_\_ Approval \_\_\_\_\_ Construction \_\_\_\_\_

Schedule #: \_\_\_\_\_

#### General Information

- The system shall feature comfort humidity control. Utilizing an integral humidity sensor, the system optimizes the indoor unit coil temperature according to the dew point, maximizing energy savings while still providing space dehumidification and occupant comfort.
- The system shall have a built-in Wi-Fi adapter as standard to allow control and monitoring using the Samsung SmartThings app.
- Auto-restart after power loss
- Soft-start compressor minimizing current inrush
- The outdoor unit shall provide 208/230V power to the indoor unit via 14 AWG X 3 interconnect power cable.
- Interconnecting control wiring between the outdoor to indoor shall be 2-conductor/stranded copper/shielded cable between 18-16 AWG.

#### Construction

- Outdoor unit: Galvanized steel with a baked-on powder coated finish for durability.
- Indoor unit: Insulated, galvanized steel.
- All heat exchangers shall be mechanically bonded aluminum fin to copper tube.

#### Refrigerant System

- The system shall utilize low-GWP R-32 refrigerant
- Refrigerant flow shall be controlled by electronic an expansion valve at the outdoor unit
- The system shall include an R32 alarm output plug on the indoor unit and outdoor unit for notification of R32 leak detection (MIM-B14U accessory is required).

#### Indoor Fan


- Three fan speeds and auto setting

#### Controls

- No additional interface modules/adapters are required when connecting to Samsung central control options.
- The unit shall be operated via a wireless or wired remote control with DDC type signal.
- Dual set temperature support when connected to supported controllers.
- Wired or wireless controllers must be purchased separately.

#### External Heat Control

- External heat control functionality allows for configuration of fan operation during auxiliary heat operation, defrost, and emergency heat (MIM-B14U accessory required when controlling heating devices other than VHK-\*\*\*C electric heat kits).
- External heat control configuration settings include outside ambient external heat lockout, outside ambient compressor lockout, and time delay options (MIM-B14U accessory required when controlling heating devices other than VHK-\*\*\*C electric heat kits).
- Emergency heat functionality allows the system to continue controlling the external heat source even when system errors prevent the heat pump from operating (MIM-B14U accessory required when controlling heating devices other than VHK-\*\*\*C electric heat kits).
- External heat control functionality allows for configuration of fan operation during

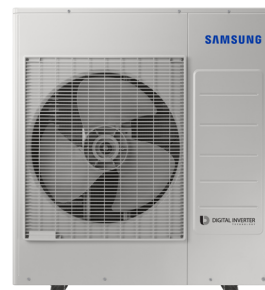

Note: Unit appearance may vary slightly

- auxiliary heat operation, defrost, and emergency heat
- Emergency heat functionality allows the system to continue controlling the external heat source even when system errors prevent the heat pump from operating

#### Convenience

- The outdoor unit shall have snow accumulation prevention option setting to prevent snow drifting against an idle outdoor unit.
- Night-time Quiet Mode: reduction of operational sound during evening hours (automatic or manual activation).
- Emergency Temperature Output (ETO) function: when indoor unit is in error status or when room temperature exceeds configurable temperature level, the system outputs a signal to an external source, e.g., backup system, building management system, alert device (ex: status light, warning lamp, buzzer).
- The system can be configured as heating/cooling, cooling only, or heating only via outdoor unit option setting.
- Maximum Current Control configurable from 50% - 100% via outdoor unit, wired controller or central control.



Intertek



Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps (excluding ductless systems) must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor or visit [www.energystar.gov](http://www.energystar.gov).

Samsung HVAC maintains a policy of ongoing development. Specifications are subject to change without notice. Refer to [www.AHRIdirectory.org](http://www.AHRIdirectory.org) for current reference numbers.

# System Specifications


Model	Indoor Unit Model Number (US Code)		AC036DNZDCG/AA (CNG36ZDD)	
	Outdoor Unit Model Number (US Code)		AC036DXADCG/AA (CXG36ADD)	
Performance	Nominal Capacity	Cooling / Heating (Btu/h)	36,000 / 40,000	
	Capacity Range	Cooling (Btu/h)	10,000 - 37,000	
		Heating (Btu/h)	10,000 - 52,000	
	AHRI 210-240 2023	SEER2		16.00
		EER2		9.50
HSPF2 (region IV)			8.60	
5°F COP			1.80	
Power	Voltage	ø / V / Hz	1 / 208-230 / 60	
	Working Voltage Range (VAC)		187 - 253	
	Operating Current (min. / standard / max.)	Cooling (A)		4.9 / 16.9 / 23.1
		Heating (A)		4.0 / 17.4 / 24.0
	Max. Breaker	Amps		30.0
Min. Circuit Ampacity	Amps		27.6	
Dimensions	W X H X D (in.)	Indoor Unit	21 X 48 X 21	
		Outdoor Unit	37 X 39 5/16 X 13	
	Weight (lbs.)	Indoor Unit		125.70
		Outdoor Unit		168.70
	Duct Connections (W X H)	Supply (in.)		12 1/2 X 18 3/4
Return (in.)			21 X 21	
Sound Pressure Level	Indoor Unit dB(A)	L / M / H	39 / 42 / 45	
	Outdoor Unit dB(A)	Cooling / Heating (high)	52 / 54	
Operating Temperatures	Outdoor	Cooling	23 - 122°F (-5 - 50°C) 0 - 122°F (-18 - 50°C) W/Baffle	
		Heating	-4 - 75°F (-20 - 24°C)	
	Indoor	Cooling	64 ~ 90°F (16 ~ 32°C)	
		Heating	T ≤ 86°F (30°C)	
Pipe Connections	Indoor & Outdoor	High side (In.)	3/8	
		Low side (In.)	5/8	
		Maximum (ft.)	164	
	Maximum Vertical Separation (ft.)		98	
	Condensate Connection		3/4" FNPT	
Refrigerant	Type		R-32	
	A2L Leak Detection		Integral	
	Factory Charge/Max Charge	oz.	95.2 / 140.96	
	Charged for		24.6 ft.	
	Trim Charge	oz./ft	0.323	
Compressor	Type		Inverter Driven, Twin BLDC Rotary	
	RLA	Amps	17.6	
Evaporator Fan	Type		Constant Torque With Double-inlet, Forward Curve, Centrifugal Fan	
	Output	Watts	410	
	External Static Pressure	Standard ("WC)		0.58
Min. / Max. ("WC)			0 / 1	
Airflow	Air Volume (L/M/H)	Cooling (CFM)	901 / 1074 / 1,229	
		Heating (CFM)	901 / 1074 / 1,229	
Condenser Fan	Type		BLDC With Axial Type Fan (2)	
	MOC / Watts / CFM (max.)		1.2A X 1 / 125W X 2 / 2,684	
Corrosion Prevention	ISO-9227 - The condenser heat exchanger showed no unusual rust or corrosion development to 2,280 hours.			
Safety	Certifications	UL 60335-2-40		
	Devices	PCB fuses, indoor unit terminal block thermal fuse, current transformer, over-voltage protection, crankcase heating, temperature limit protection logic, compressor overload sensing		

## Accessories

Wired controller	Advanced	MWR-WG01UN
	Touchscreen	MWR-SH12UN
Thermostat adapter (for connection to standard 24VAC thermostats)		MIM-A60UN
Wireless signal control	Wireless signal receiver	MRK-A10UN
	Wireless controller	AR-CH01U
External temperature sensor		MRW-TAU
External contact control interface module		MIM-B14U
Filter box		VFB-2
Downflow Kit		VDK-2W
Supplemental electric heat kit	3kW	VHK-203C
	5kW	VHK-205C
	10kW	VHK-210C
Wall bracket (for outdoor unit)		CKN-250
Wind baffles	Front	WBF-2M-B
	Back	WBB-3M
Hail guard kit (includes back and side guards)		HGK-3
Line set - insulated and flared, interconnect cables included	25'	ILS2510
	50'	ILS5010

# Dimensional Drawing AC036DNZDCG/AA (CNG36ZDD)


Unit: Inches

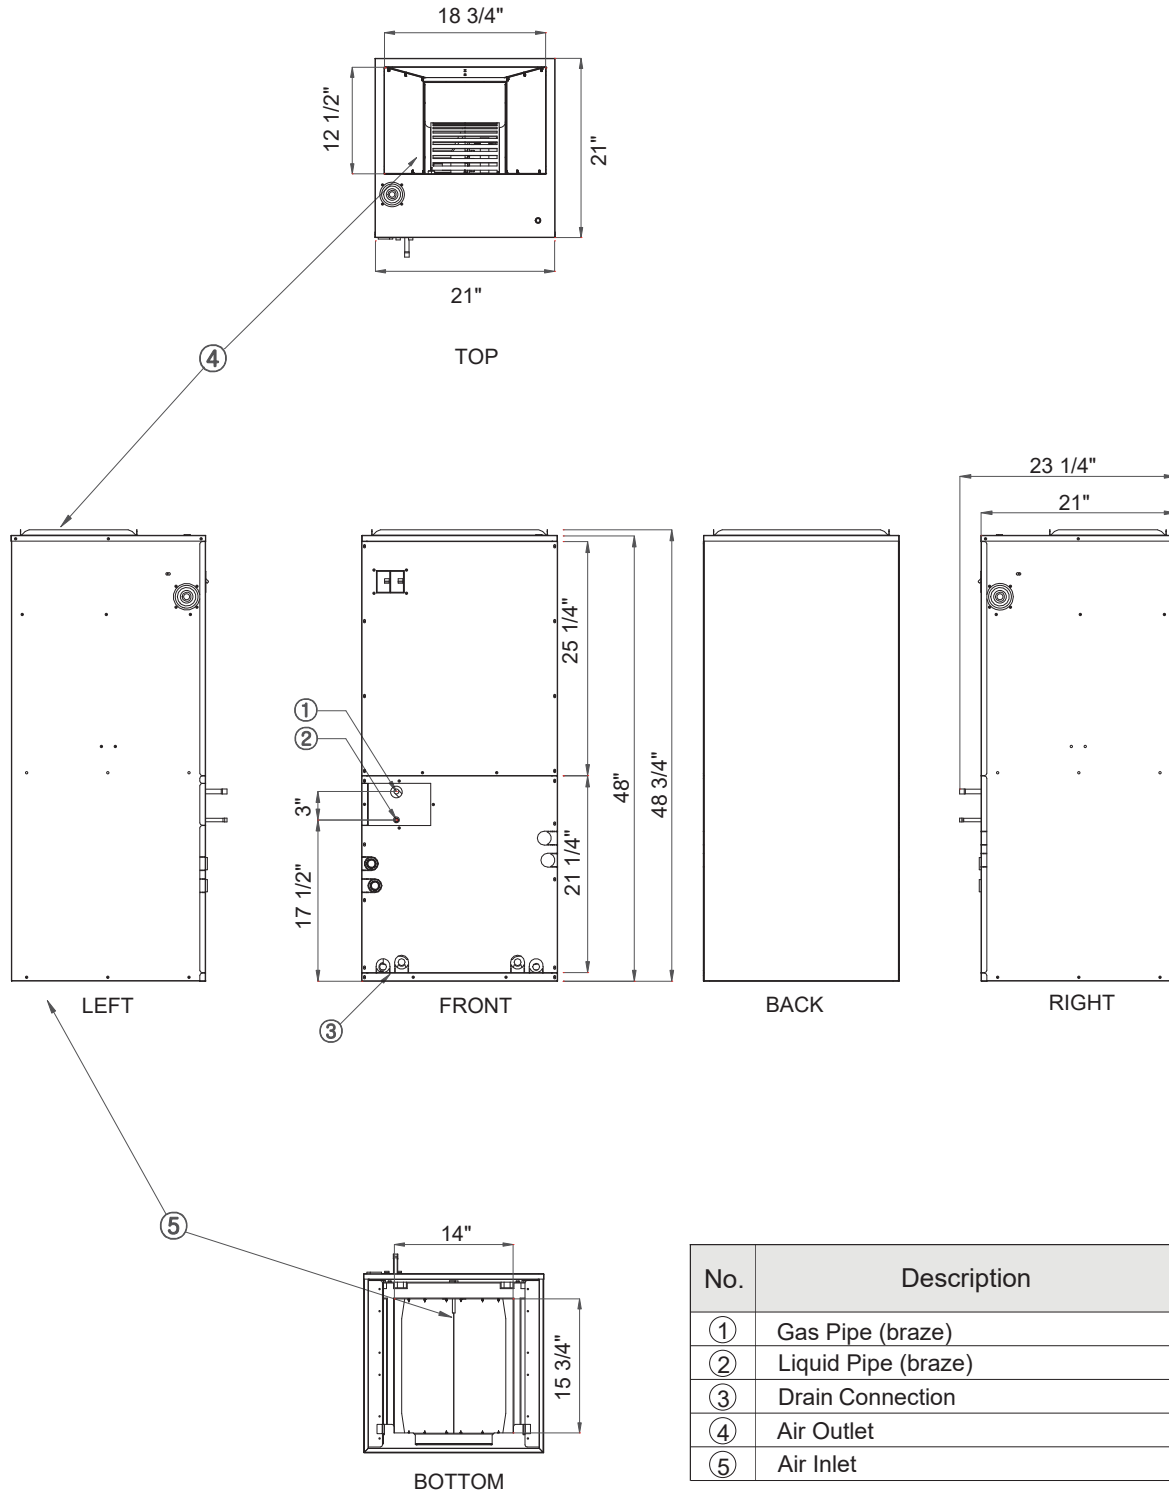

No.	Description
①	Gas Pipe (braze)
②	Liquid Pipe (braze)
③	Drain Connection
④	Air Outlet
⑤	Air Inlet

# Dimensional Drawing AC036DXADCG/AA (CXG36ADD)

Unit: Inches

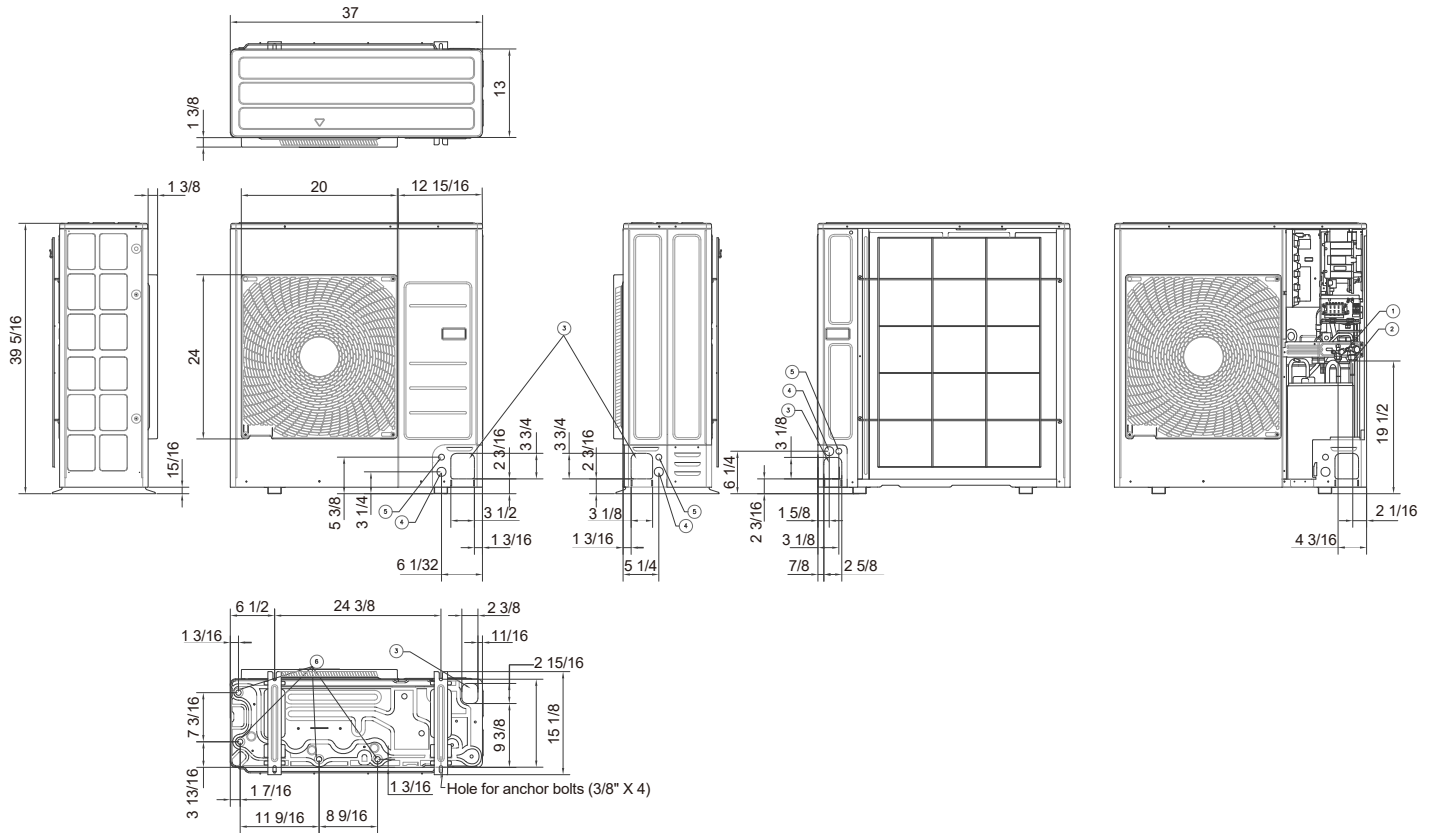

No.	Description
1	Liquid pipe connection
2	Gas pipe connection
3	Pipe intake knockout hole
4	Opening for power wire conduit (1 3/8")
5	Opening for communication conduit (7/8")
6	Drain hole