



**Submittal Data Sheet**

Daikin Entra 9K Indoor High Wall Unit  
FTXB09BXVJU

**FEATURES**

- Titanium apatite photocatalytic air purifying filter
- Daikin Swing Compressor
- Inverter Compressor


**BENEFITS**

- 10 year limited parts and compressor warranty with online registration

**INDOOR UNIT**



**OUTDOOR UNIT**

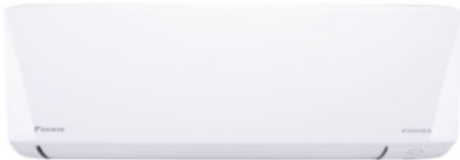



Submittal Data Sheet

Daikin Entra 9K Indoor High Wall Unit  
FTXB09BXVJU

EFFICIENCY:	
COOLING:	HEATING:
SEER	HSPF
EER	COP

PERFORMANCE:			
COOLING (Btu/Hr):		HEATING (Btu/Hr):	
Rated:(Min/Max):	8,800 ( / )	47° Rated:(Min/Max):	9,400 ( / )
Sensible AHRI:		17° Rated:	Add MSS
Moisture Removal (Gal/Hr):	0.1	5° Max:	Add MSS
Standard Operating Range:	50°F - 115°F	Operating Range:	5°F - 64°F
Extended Operating Range:	°F - °F	47° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	17° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection (in):	3/8
System MCA:	12.4	Liquid Connection (in):	1/4
System MFA:	15.0	Drain Connection (in):	5/8
Compressor RLA:		Max. Interunit Piping Length (ft):	66
Outdoor fan motor FLA:		Max. Interunit Height Difference (ft):	
Outdoor fan motor W:		Refrigerant Pre-Charged Pipe Length (ft):	
Indoor fan motor FLA:	0.1	Additional Charge of Refrigerant (oz/ft):	
Indoor fan motor W:			
MCA: Min.circuit amps	MFA: Max.fuse amps	RLA: Rated load amps	
		FLA: Full load amps	W: Rated output watts




Submittal Data Sheet

Daikin Entra 9K Indoor High Wall Unit  
FTXB09BXVJU

INDOOR SPECIFICATIONS					
COOLING - Airflow Rate (cfm):				HEATING - Airflow Rate (cfm):	
High:	431	Med:	322	High:	402
Low:	249	SuperLow:	142	Med:	322
Sound Pressure (H/M/L/SL) (dBA):				43/36/29/19	
				Sound Pressure (H/M/L/SL) (dBA):	42/35/29/25
Dimensions (HxWxD) (in):		11-1/3 x 30-5/16 x 9-3/16		Net Weight (lb):	20.3

DIMENSIONAL DRAWING - INDOOR UNIT

Model : FTXB09/12B

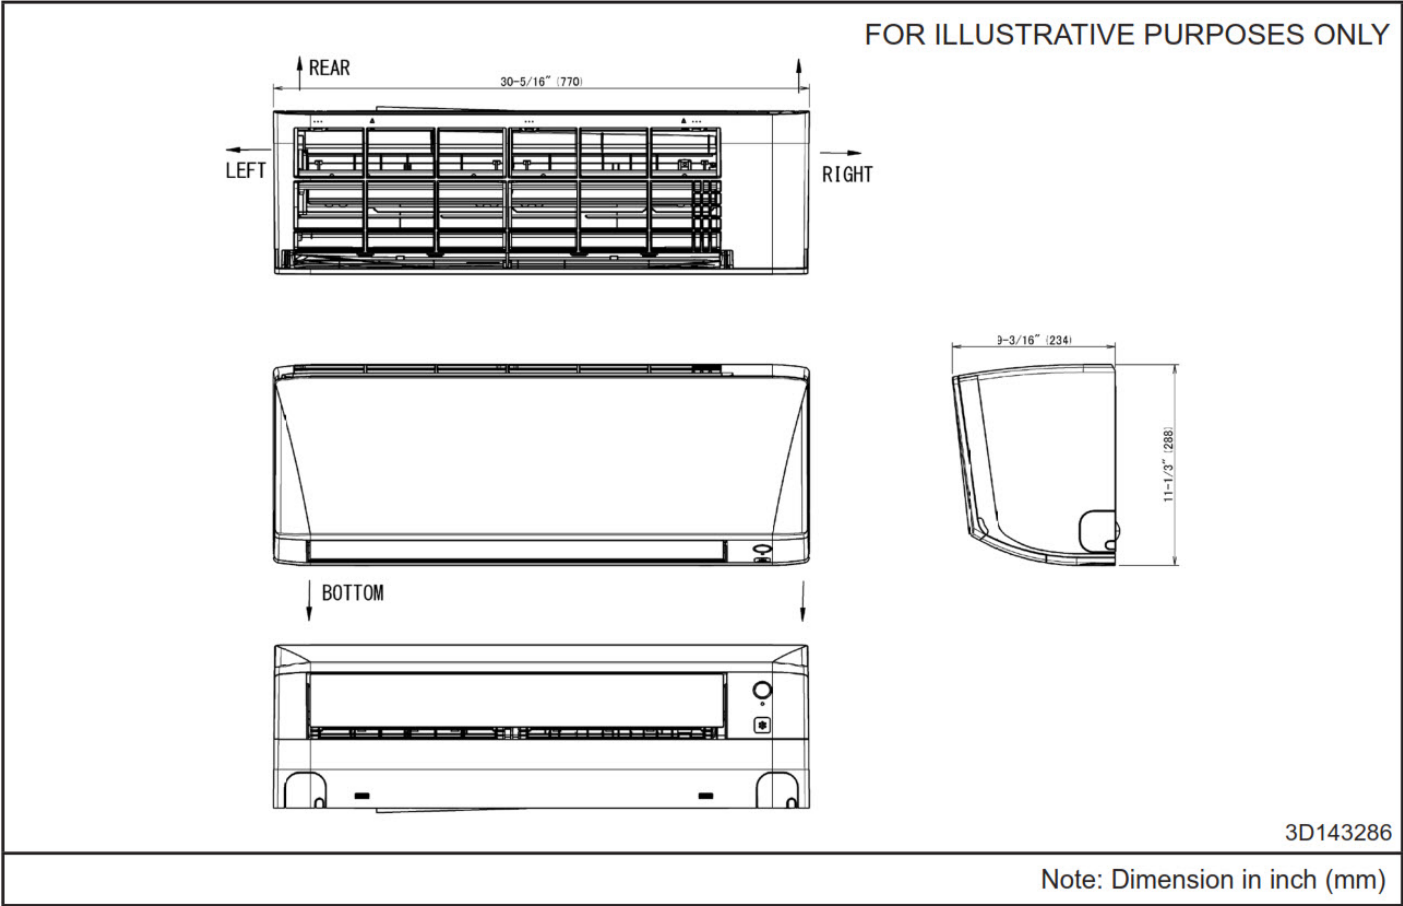




Submittal Data Sheet

Daikin Entra 9K Indoor High Wall Unit  
FTXB09BXVJU

OUTDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	431	High:	402
SuperLow:	142	SuperLow:	219
Compressor Stage:		Refrigerant Type:	R-410A
Factory Charge (Lbs):		Refrigerant Oil:	
Sound Pressure Level (dBA):		43	
Dimensions (HxWxD) (in):	11-1/3 x 30-5/16 x 9-3/16	Net Weight (lb):	20.3

DIMENSIONAL DRAWING - OUTDOOR UNIT

Model : FTXB09/12B

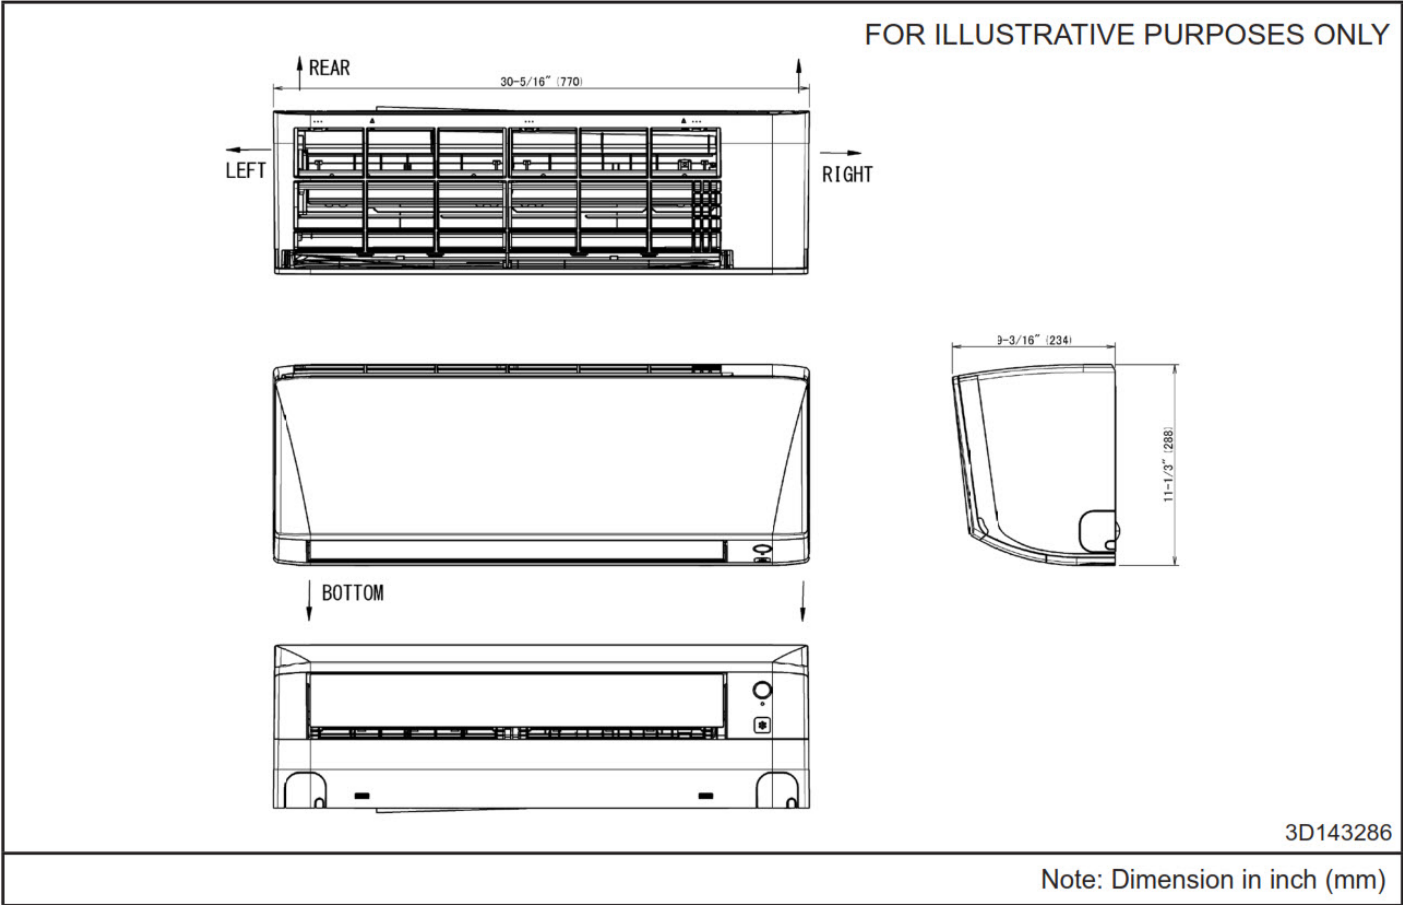



**Submittal Data Sheet**

Daikin Entra 9K Indoor High Wall Unit  
FTXB09BXVJU