

Job Name

Purchaser

Submitted to

Unit Designation

Location

Engineer

Reference

Schedule #

Approval

Construction

Specifications

Model	US Code		CNH18JDB
	Model Number		AC018BNJDCH/AA
Performance	Nominal Capacity	Cooling (Btu/h)	17,000
		Heating (Btu/h)	19,000
Power	Voltage (øV/Hz)		1 / 208-230 / 60
	Nominal Running Current (A)		0.35
Fan	Type		Turbo (1)
	Motor	Type	BLDC (1)
		FLA / Output	0.35A / 35 W
Airflow	CFM	L/M/H	261 / 297 / 332
Refrigerant	Type		R410A
	Control Method		Electronic Expansion Valve (at outdoor unit)
Piping Connections	Liquid (flare)	Inches	1/4
	Suction (flare)	Inches	1/2
	Drain	Inches	ID 1
Unit Dimensions	W X H X D	Inches	28 3/8 X 24 7/16 X 7 13/16
	Weight	lbs.	35.1
Sound Level	L / M / H	dB(A)	35 / 39 / 42
Accessories	Wired Controllers	Advanced	MWR-WG00UN
		Simple Touch	MWR-SH11UN
	24VAC Thermostat Adapter		MIM-A60UN
	Wi-Fi Adapter For Remote Control ¹		MIM-H04UN
	External Temperature Sensor		MRW-TA
	External Contact Control Interface Module		MIM-B14
	CN83 Pigtail		DB39-01263A
	Line sets - insulated and flared, interconnect cables included		25' - ILS2507
50' - ILS5007			
Safety Certifications			ETL (UL 1995)



- High-voltage terminal block temperature sensor to disable unit in the event overheating of power connection.
- System energy consumption can be viewed using the Samsung SmartThings mobile app (not revenue grade, for reference only)

Indoor Fan

- Indoor fan is turbo type with a single fan motor
- Three fan speed settings and auto setting
- Washable filter as standard (included)
- The front panel shall have LED indicator lights, touch controls, IR receiver, and 1 motorized louver.
- The unit shall discharge cool air from the upper outlet louver (motorized upper and lower) (manual adjustment only) outlets while in heating mode.

Construction

- Insulated, HIPS chassis certified to UL94 V0

Controls

- Control wiring shall be 2 X 16 AWG
- The unit shall be operated via a wireless or wired remote control with DDC type signal
- Dual set temperature support when connected to MWR-WG00UN Advanced Wired Controller or central control options.
- Wired controllers must be purchased separately
- The unit shall ship with a wireless controller, holder, and batteries.

Refrigerant System

- Refrigerant flow shall be controlled by an electronic expansion valve at outdoor unit

Warranty


10 Years compressor, 10 years parts, 1 year limited labor when registered

Compatibility

Will only operate with Samsung outdoor unit model numbers:
AC018BXADCH/AA (CXH18ADB), AJ024BXJ3CH/AA (JXH24J3B), AJ036BXJ4CH/AA (JXH36J4B), AJ048BXJ5CH/AA (JXH48J5B), AJ024BXS4CH/AA (JXH24S4B), AJ030BXS4CH/AA (JXH30S4B), AJ036BXJ4CH/AA (JXH36J4B), AJ036BXS4CH/AA (JXH36S4B), AJ048BXJ5CH/AA (JXH48J5B)

Nominal cooling capacities are based on: Indoor temperature: 80 °F DB, 67°F WB. Outdoor temperature: 95°F DB, 75°F WB.
Nominal heating capacities are based on: Indoor temperature: 70 °F DB, 60°F WB. Outdoor temperature: 47°F DB, 43°F WB.
Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.

¹ MIM-H04UN is only required for remote control of cassette, console, and duct indoor units. Only one per system is required.

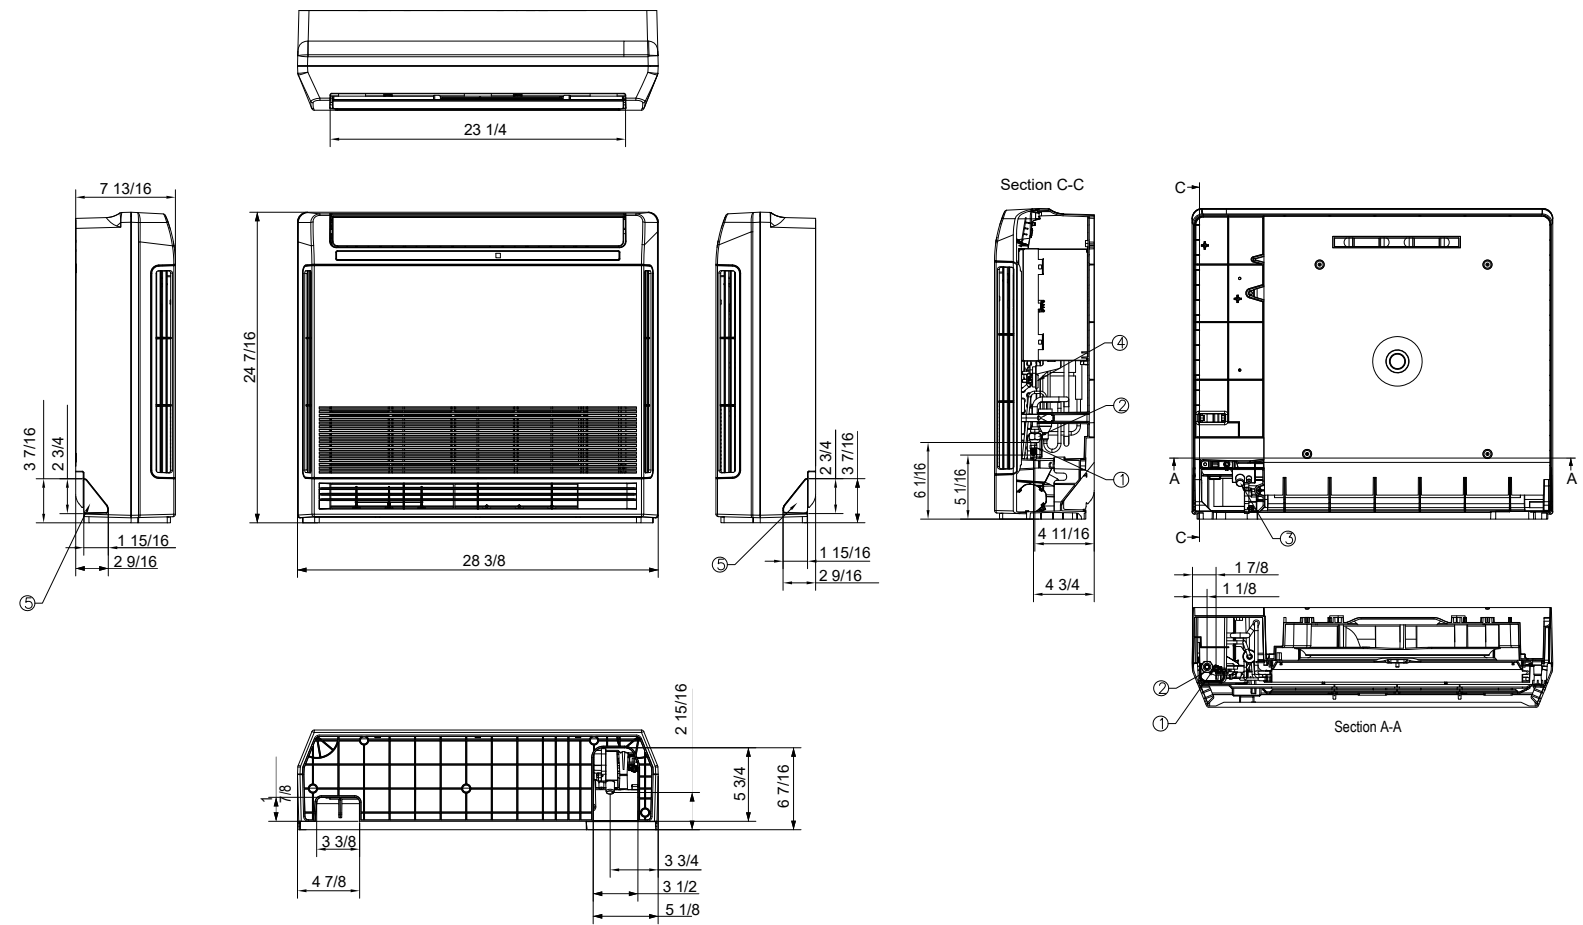

No.	Description
1	Liquid pipe connection
2	Suction pipe connection
3	Drain connection
4	Power and comm.wire conduit
5	Drain Knockout

Note: Actual appearance may vary.