

SUBMITTAL - 12KPAS1

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **ASUH12KPAS**

Outdoor Unit: **AOUH12KPAS1**



FEATURES

INDOOR UNIT:

- Compact wall-mounted indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 19dB
- Multiple fan speed options; Auto, High, Med-High, Med, Med-Low, Low, and Quiet.
- Special Operation modes available:
 - Economy Mode / Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Backlit wireless remote controller with luminous buttons for easy visibility, included with the indoor unit
 - Wi-Fi connectivity with Airstage Mobile App monitoring via compatible USB WLAN adapter
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with building management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Dual-action Filtration: Apple-Catechin Filter & Ion Deodorizing Filter
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Multiple Auxiliary Heat logic for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)

OUTDOOR UNIT FEATURES

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Compact outdoor unit with extended line set lengths up to 66ft (20m)
- Up to 16% higher rated heating capacity than nominal capacity
- Low-noise outdoor unit operation mode
- Hydro Fin-coated heat exchanger for improved corrosion resistance and coil durability



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250409A

-1 of 6-

SUBMITTAL - 12KPAS1

SPECIFICATIONS:

Indoor Unit					ASUH12KPAS		
Outdoor Unit					AOUH12KPAS1		
System Name					12KPAS1		
AHRI Number					215212610		
SEER2		Cooling			Btu/hW	24	
EER2						11.7	
HSPF 2 (IV) / HSPF 2 (V)		Heating			kW/kW	10.5 / 7.9	
COP2						3.8	
Outdoor Operation Range		Cooling			°F (°C)	14 to 122*8 (-10 to 50*8)	
		Heating				5 to 75 (-15 to 24)	
Indoor Capacity		Cooling		Rated	Btu/h	12000	
				Min.—Max.		3,100—13,600	
		Heating	47°FDB (Outdoor temp.)			Rated	14000
						Min.—Max.	2,700—17,000
			17°FDB (Outdoor temp.) ^{*1}			Rated	8700
						Max.	11000
			5°FDB (Outdoor temp.) ^{*2}			Rated	8500
						Max.	
Outdoor Connection pipe	Size	Liquid			in (mm)	Ø1/4 (Ø6.35)	
		Gas				Ø3/8 (Ø9.52)	
	Method				FLARE		
	Pre-charge length				ft (m)	49 (15)	
	Min. length					10 (3)	
	Max. length					66 (20)	
	Max. height difference					49 (15)	
Indoor Dimensions (H × W × D)		Net			in (mm)	10-5/8 × 32-13/16 × 8-3/4 (270 × 834 × 222)	
		Gross				10-7/8 × 36 × 13-1/16 (277 × 914 × 332)	
Indoor Weight		Net			lb (kg)	21 (9.5)	
		Gross				26 (12.0)	
Outdoor Dimensions (H × W × D)		Net			in (mm)	21-5/16 × 26-1/8 × 11-7/16 (541 × 663 × 290)	
		Gross				23-11/16 × 31-5/8 × 14-3/4 (602 × 804 × 375)	
Outdoor Weight		Net			lb (kg)	57 (26)	
		Gross				62 (28)	
Indoor Fan	Airflow rate	Cooling		High	CFM (m³/h)	430 (730)	
				Med—High		365 (620)	
				Med		318 (540)	
				Med—Low		283 (480)	
				Low		247 (420)	
				Quiet		153 (260)	
		Heating		High		436 (740)	
				Med—High		394 (670)	
				Med		365 (620)	
				Med—Low		330 (560)	
				Low		300 (510)	
				Quiet		188 (320)	
	Type × Qty				CROSSFLOW FAN × 1		
	Outdoor Fan	Airflow rate	Motor output			W	30
			Cooling		CFM (m³/h)	959 (1,630)	
Heating			818 (1,390)				
Type × Qty				PROPELLER FAN × 1			
Indoor Sound Pressure Level*4		Cooling			dB (A)	23	
						High	42
						Med—High	38
						Med	34
						Med—Low	32
						Low	29
		Heating		Quiet		19	
				High		42	
				Med—High		39	
				Med		38	
				Med—Low		35	
				Low		33	
Outdoor Sound Pressure Level*4		Cooling				48	
		Heating					

SUBMITTAL - 12KPAS1

SPECIFICATIONS:

Outdoor Refrigerant		Type		R32	
		Charge	lb oz	1 lb 9 oz	
			g	700	
Additional Charge Calculation			oz/ft	0.22	
			g/m	20	
Outdoor Refrigerant Oil		Type		RB74AF	
		Amount	in ³ (cm ³)	14.6 (240)	
Indoor Moisture removal			pints/h (L/h)	3.40 (1.59)	
Indoor Drain hose		Material		POLYPROPYLENE + HIGH-DENSITY POLYETHYLENE	
		Tip Diameter	in (mm)	I.D.: Ø17/32 (Ø13.8), O.D.: Ø19/32 to Ø21/32 (Ø15.0 to Ø16.8)	
Indoor Operation range		Cooling	°F (°C)	64 to 90 (18 to 32)	
			%RH	80 or less	
		Heating	°F (°C)	60 to 86 (16 to 30)	
Power Supply				208/230 V~ 60 Hz	
Available Voltage Range				187—253	
System power supply		Voltage		208/230	
		Frequency		60	
		Available voltage range		187—253	
Indoor Current	Cooling		A	4.8	
	Heating			5	
Maximum Operating Current* ³				Cooling	6.9
				Heating	7.9
Outdoor Starting Current				5	
MCA* ⁵				9.7	
Wiring spec.* ⁶		MAX. CKT. BKR* ⁷		15	
Indoor Input Power	Cooling			Rated	1.03
			Min.—Max.	0.13—1.35	
	Heating	Rated	1.08		
		Min.—Max.	0.13—1.43		
		Rated	0.89		
		Max.	1.2		
		Rated	1.095		
		Max.			
Indoor Power Factor	Cooling		%	93.3	
	Heating			93.9	
Energy Star* ⁹				ES	

NOTES

- Cooling: Indoor temperature of 80°F (26.67°CDB)/67°FWB (19.44°CWB), and outdoor temperature of 95°FDB (35°CDB)/75°FWB (23.9°CWB).
- Heating: Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 47°FDB (8.33°CDB)/43°FWB (6.11°CWB).
- 17°FDB (Outdoor temp.) —*1: Heating (17°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 17°FDB (-8.33°CDB)/15°FWB (-9.44°CWB).
- 5°FDB (Outdoor temp.) —*2: Heating (5°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 5°FDB (-15.0°CDB)/4°FWB (-15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.
- *4:
- Indoor Sound Pressure Level —Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level —Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- *3:
- Maximum Operating Current —Maximum current is maximum value when operated within the operation range.
- The total current of indoor unit and outdoor unit.
- MCA —*5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)
- Wiring spec. —*6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.
- As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.
- MAX. CKT. BKR —*7: Maximum Circuit Breaker
- Operation Range —*8: Suction temperature of the outdoor unit.
- System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.
- MAX. CKT. BKR —*7: Maximum Circuit Breaker
- Operation Range —*8: Suction temperature of the outdoor unit.
- Energy Star —*9: ES = Energy Star, ESCC = Energy Star Cold Climate, ESME = Energy Star Most Efficient.
- System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

SUBMITTAL - 12KPAS1

ACCESSORIES:

Model Number	Description
UTY-RVRU ^{*1}	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5 ^{*1}	Touch Panel Wired Remote Controller
UTY-RHRY ^{*1}	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY ^{*1}	Simple Wired Remote (With Mode Function)
UTY-TWRXZ2	Communication Kit - Wall Mount
UTY-TFSXH4	Wi-Fi Adapter (WiFi Interface Module USB Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX ^{*1}	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX ^{*1}	External Switch Controller
UTY-TTRXZ1 ^{*1, 2}	24V Thermostat Interface
TTRXZ1-KIT ^{*1, 2}	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WIFI Plug & 24V Transformer)
UTY-XCSXZ2	External input and output PCB
UTY-XWZX	External Wire Kit
UTY-XWZXZ5	External Connect Kit
UTY-DSGYZ2 ^{*3}	Airstage Edge Controller

NOTES:


*1 -Requires Communication kit UTY-TWRXZ2 to connect this device to IDU.

*2 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

*3 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

SUBMITTAL - 12KPAS1



INDOOR UNIT DIMENSIONS:

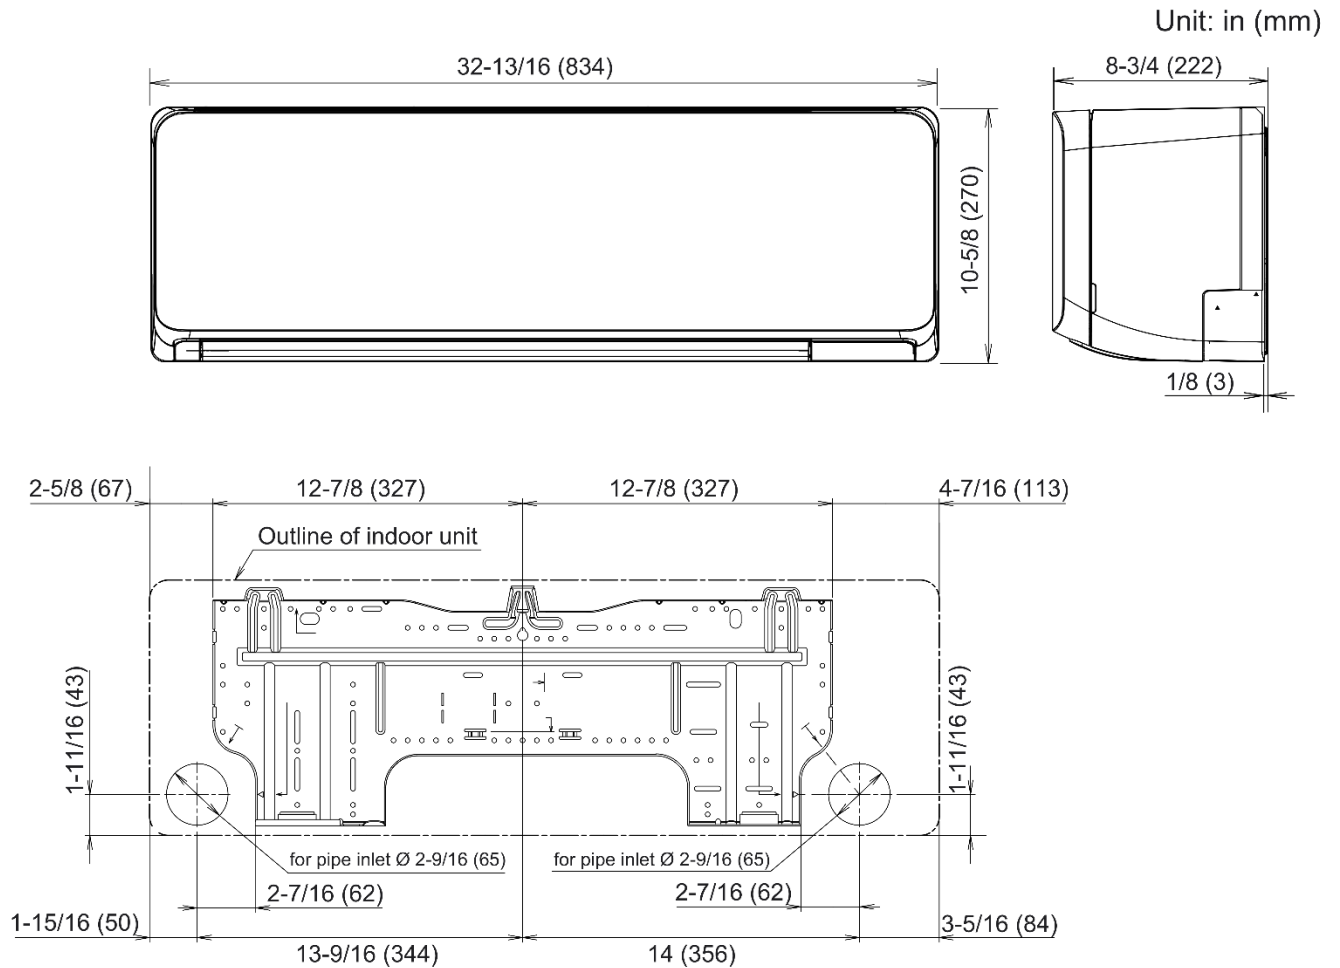

SUBMITTAL - 12KPAS1

OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

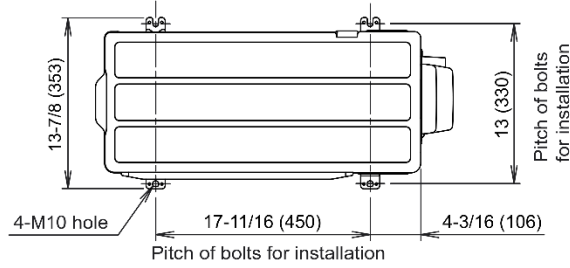

Side view

