

Hisense Hi-EDGE 18k 230V

Hisense

Submittal Data: AS-18UW3SXADL AS-18UW3SXADLG
18,000 BTU/H, Wall-Mounted Heat Pump System

Job Name:	Location:		
Purchaser:	Submitted by:		
Submitted to:	Reference:	Approval:	Construction:
Engineer:	Date:	Application:	

- 1\WiFi built-in, Available ConnectLife APP for both iOS and Android to control your room temp. with smartphone
- 2\High energy efficiency by DC Inverter technology
- 3\Heating below -15°C (5°F)
- 4\Chassis Electric heater
- 5\ Easy installation
- 6\ "I feel" in remote controller
- 7\ 2 -Way Drain Connection (Left or Right)
- 8\Washable High Definition Filter
- 9\Indoor Self-Cleaning w/ FrostClean Technology
- 10\Optional Wired Controller

Images provided for reference purposes only



Performance:

Cooling	Cooling Capacity	Btu/h	18,000
	Cooling Capacity Range	Btu/h	6500-19500
	Rated Input-Cooling	W	1700
Heating at 47°F	Heating Capacity	Btu/h	20,000
	Heating Capacity Range	Btu/h	6000-21500
	Rated Input-Heating	W	2,000
Heating at -8.3 °C (17°F AHRI)	Heating Capacity	Btu/h	11,600
Heating at -15 °C (5 °F)	Heating Capacity	Btu/h	11,000
Heating at -20 °C (-5 °F)	Heating Capacity	Btu/h	NA
Heating at -25 °C (-13 °F)	Heating Capacity	Btu/h	NA
Heating at -30 °C (-22 °F)	Heating Capacity	Btu/h	NA

Efficiency:

SEER	17.60
SEER2	17.00
HSPF	10.10
HSPF2	8.00
EER -BTU/W	10.60
COP -BTU/W	10.00

Outdoor Operating Temperature Range:

Working Temperature Range - Cooling	(°C/°F)	0°C-46°C; (32°F-115°F)
Working Temperature Range - Heating	(°C/°F)	-15°C-24°C;

Electrical:

Power Supply	230V~,208V~,60Hz,1P	
Rated Current	Cooling (A)	7.6
	Heating (A)	9.0
Current Range	Cooling (A)	1.8-12
	Heating (A)	1.8-12
Max Fuse Size/Fusable Max.	A	20
Min.Circuit Ampacity	A	15



Submittal Data: AS-18UW3SXADL AS-18UW3SXADLG 18,000 BTU/H, Wall-Mounted Heat Pump System

Indoor Unit Specifications:

Fan Motor Output	W	35
Fan Motor Speed (H/M/L)	RPM	1150/990/800
Moisture Removal	L/H.r	2
Air Circulation (Ultra\High\Medium\Low)	m3/h	1000/900/750/580
Sound Pressure(Higer/H/M/L/silence)	dB (A)	46/45/43/38/35
Net Dimensions WxHxD	mm	960×320×240
	in.	37 x12 7/8x9 7/16
Net Weight	kg	12.5
	lbs.	27.6

Outdoor Unit Specifications:


Fan Motor Output	W	41
Fan Motor Speed (H/M/L)	RPM	910
Sound pressure	dB (A)	56
Refrigerant charge volume	g	R410A/1400
Net Dimensions WxHxD	mm	810x585x280
	in.	31 7/8x23x11
Net Weight	kg	39
	lbs.	86.0
Liquid Pipe	in.	1/4
Gas Pipe	in.	1/2
Maximum Piping Length	m.	20
Maximum Height Difference	m.	10

Model No.	Description:
RCH-RTY5-0	Remote Controller
YXE-C01U1	Wired Controller (Optional)




Submittal Data: AS-18UW3SXADL AS-18UW3SXADLG
 18,000 BTU/H, Wall-Mounted Heat Pump System

Indoor Unit Outline and Dimensions:

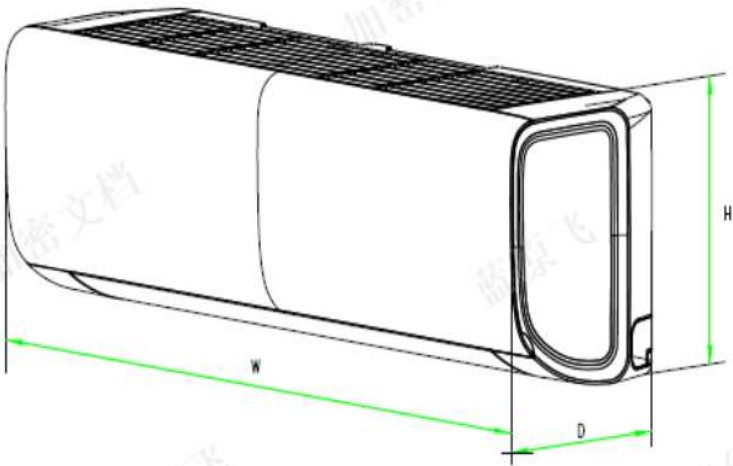

	W	H	D
mm	960	320	240
in	37.8	12.6	9.4

Outdoor Unit Outline and Dimensions:

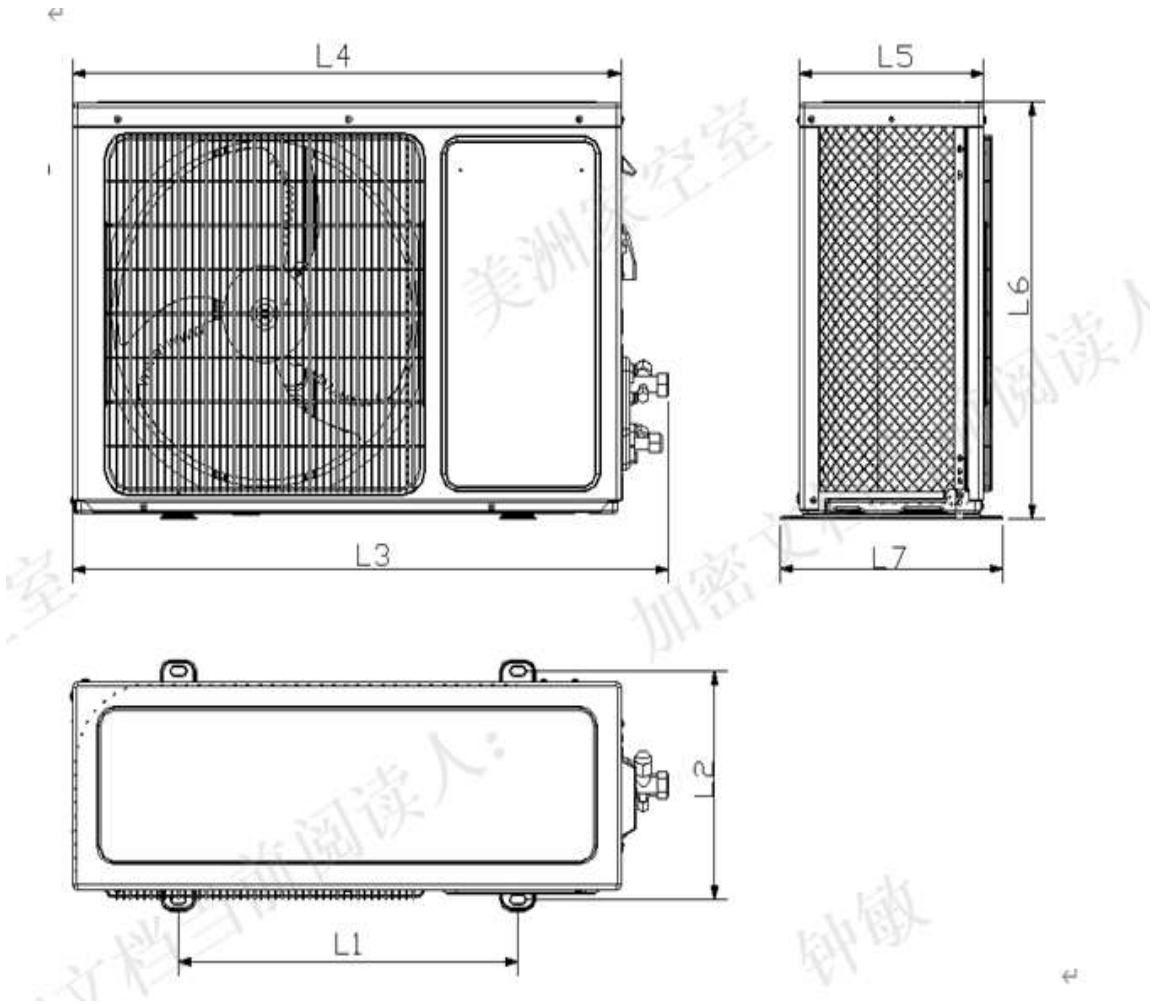

	L1	L2	L3	L4	L5	L6	L7
mm	510	310	873	810	280	585	338
in	20.08	12.20	34.37	31.89	11.02	23.03	13.31