# SAMSUNG

## **360 CASSETTE**

# Well rounded.

#### A truly circular cassette.

Enjoy even airflow from a beautifully sleek design that fits into any setting.



## A round of applause.

This truly innovative system provides surround airflow evenly throughout the space. Available in black and white, you can choose a circle or square fascia panel.









## Bladeless beauty.

Standard ceiling cassettes use blades on 4 sides of the unit to distribute air. This 4-sided distribution creates uneven room temperature, resulting in "cold" or "hot" spots. With bladeless technology and the use of 3 booster fans, the 360 Cassette provides even, horizontal airflow with the option to direct the air at various angles.

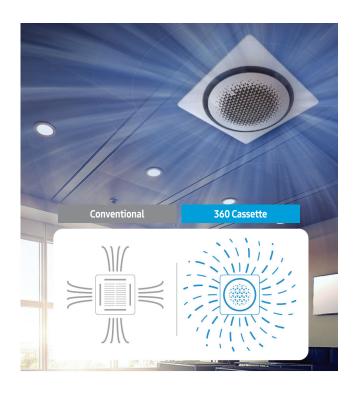





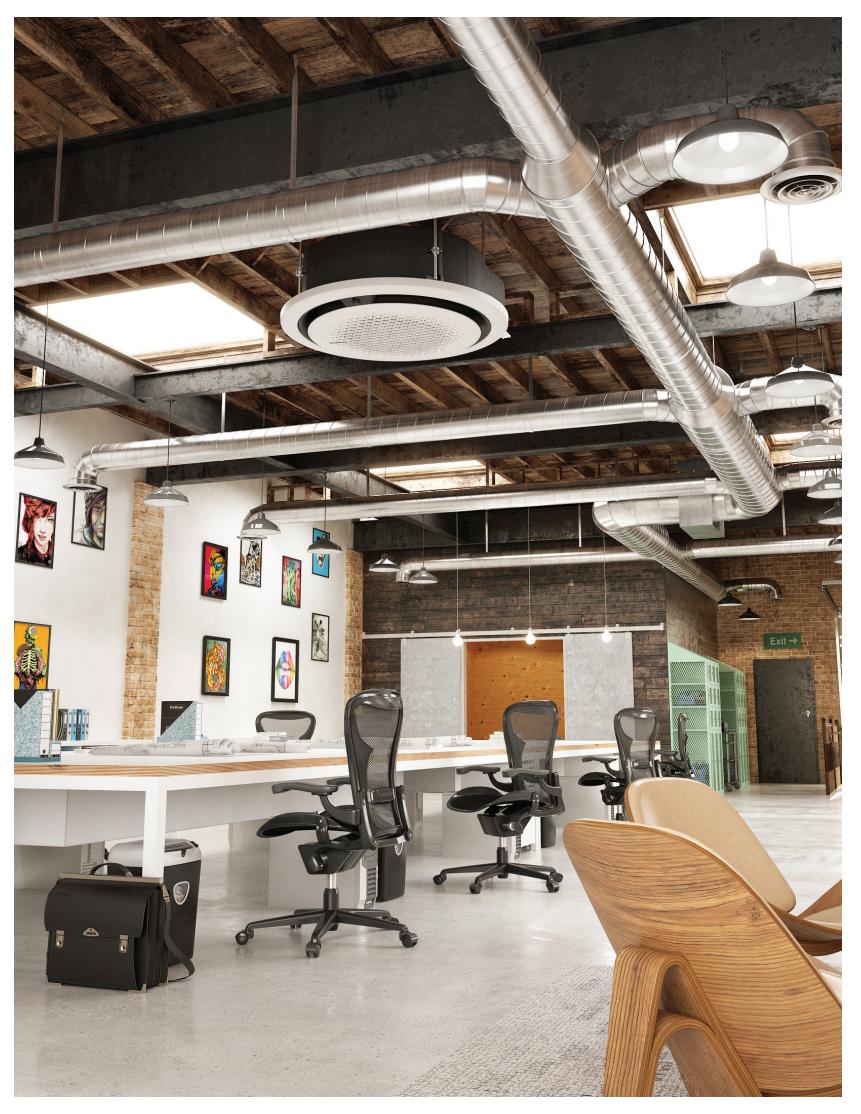


## Cool from every angle.

The 360 Cassette is available in a wide range of heating and cooling capacities to fit commercial and light commercial applications. Its innovative circular design can match a multitude of interior designs, so it perfectly fits in everywhere.







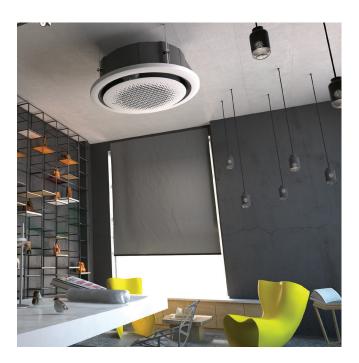

- Available as a 1-1 CAC system and models are also available for DVM S systems
- More efficient than conventional (non-inverter) systems
- Quiet Operation; 29dB of sound on the low speed setting. Applies to the 18k and 24k models.
- IF Design Award 2016 Winner (http://ifworlddesignguide.com/)



## Wi-Fi Adapter

Samsung's Wi-Fi Adapter allows for remote control of Samsung DVM S indoor units and CAC single zone systems from a mobile device when using the Samsung Smart Home App\*.

#### **App Features:**

- Daily, weekly and monthly energy consumption monitoring\*\*
- Basic control and monitoring of power, mode, set temperature, room temperature, fan speed, and supply air louver position
- 7-day scheduling for single or multiple units







WI-FI ADAPTER (MIM-HO3UN)

Maximum Wi-Fi Adapter Qua	antity Per System
CAC Single Zone Systems	1
DVM S Systems	4

One MIM-H03UN Wi-Fi Adapter can control up to 16 indoor units on a single DVM S system, or connect a maximum of 4 adapters for control of up to 64 indoor units on the same system. Group configuration allows for simple control of multiple units connected to the same Wi-Fi Adapter.

### Individual Control

There are many different ways to control a Samsung system. For applications where a wireless controller is not acceptable (i.e. public facilities), three wired controllers, Simple, Touchscreen, and Premium are available to purchase as an option. Based on desired level of control and user interface preference, Samsung offers a variety of wired controllers suitable for any application.



WIRELESS REMOTE CONTROLLER AR-KH00U



SIMPIFIED WIRED CONTROLLER MWR-SH00N



TOUCHSCREEN CONTROLLER MWR-SH10N



PREMIUM WIRED CONTROLLER MWR-WE11N

## **Central Controls**

Samsung's Data Management Server (DMS) lets you monitor and control your on-site air conditioning needs remotely. It's the easiest and most convenient way to manage a large number of air conditioning units at once.

#### DMS 2.5:

- 24-hour standalone web-server
- No special software required
- All management functions integrated
- Heat pump auto changeover logic
- DMS 2.5 + BACnet and LonWorks available
- BACnet and LonWorks gateways will wire and setup the same as DMS 2.5

Please refer to  ${\bf www.dvmdownload.com}$  for all control options, features, and specification.

<sup>\*\*</sup>Energy consumption data is used for general reference only and should not be used for billing purposes. Data provided will not necessarily match your utility bill.



DMS 2.5 MIM-D01AUN

<sup>\*</sup>Samsung's Smart Home App is available for download on iTunes and Google Play.

## CAC 360 CASSETTE

SPECIFICATIONS - 18,000 | 24,000 | 30,000

	INDOOR UNIT		AC018KN4DCH/AA	AC024KN4DCH/AA	AC030KN4DCH/AA
MODEL	OUTDOOR UNIT		AC018JXADCH/AA	AC024JXADCH/AA	AC030JXADCH/AA
		COOLING	18,000 Btu/h	24,000 Btu/h	30,000 Btu/h
	CAPACITY	HEATING	20,000 Btu/h	27,000 Btu/h	30,000 Btu/h
		COOLING	5,000 - 21,000 Btu/h	7,000 Btu/h	9,300 - 35,000 Btu/h
PERFORMANCE	CAPACITY RANGE	HEATING	· · · · · · · · · · · · · · · · · · ·	· · ·	
ERFORMANCE	SEER / EER	HEATING	3,800 - 25,000 Btu/h	5,200 - 31,000 Btu/h	9,000 - 38,000 Btu/h
			20.10 / 11.40	20.50 / 11.10	19.20 / 10.40
	COP		3.66	3.20	3.06
	HSPF		10.0	10.0	9.9
	VOLTAGE	ø / V / Hz	1/208-230/60	1/208-230/60	1/208-230/60
OWER	MAX. BREAKER		15 A	20 A	30 A
	MIN. CIRCUIT AMPACI	TY	8.1 A	12.06 A	19.7 A
		INDOOR	37 1/4 X 11 X 37 1/4 in.	37 1/4 X 11 X 37 1/4 in.	37 1/4 X 14 3/8 X 37 1/4 in.
	WXHXD	OUTDOOR	34 5/8 X 25 1/8 X 12 1/4 in.	37 X 39 11/16 X 13 in.	37 X 39 11/16 X 13 in.
DIMENSIONS		INDOOR	46.3 lbs.	46.3 lbs.	52.91 lbs.
	WEIGHT	OUTDOOR	99 lbs.	142 lbs.	154 lbs.
	INIDOOD				I T
OUND PRESSURE LEVEL	INDOOR	L/M/H	29 / 32 / 35 dB(A)	29 / 33 / 36 dB(A)	31 / 35 / 38 dB(A)
	OUTDOOR	COOLING / HEATING (HIGH)	48 / 48 dB(A)	50 / 50 dB(A)	50 / 52 dB(A)
PERATING TEMPERATURE	OUTDOOR	COOLING	(0*) 23 ≤ T ≤ 115°F	(0*) 23 ≤ T ≤ 115°F	(0*) 23 ≤ T ≤ 115°F
		HEATING	-4≤T≤76°F	-4≤T≤76°F	-4 ≤ T ≤ 76°F
	INDOOR & OUTDOOR	HIGH SIDE (FLARE)	1/4 in.	1/4 in.	3/8 in.
	INDOOR & OUTDOOR	LOW SIDE (FLARE)	1/2 in.	5/8 in.	5/8 in.
IPE CONNECTIONS	MAX. LINE SET LENGT	Н	98 ft.	164 ft.	164 ft.
	MAX. VERTICAL SEPAI	RATION	66 ft.	98 ft.	98 ft.
	CONDENSATE CONNE	CTION	1 1/4 in. OD, 1 in. ID	11/4 in. OD, 1 in. ID	11/4 in. OD, 1 in. ID
	TYPE		R410A	R410A	R410A
EFRIGERANT	FACTORY CHARGE		45.86 oz.	74.08 oz.	91.71 oz.
EFRIGERANI	CHARGED FOR		45.80 02. 25 ft.	74.08 02. 25 ft.	25 ft.
				I .	
COMPRESSOR	TYPE		Inverter Driven, Twin BLDC Rotary	Inverter Driven, Twin BLDC Rotary	Inverter Driven, Twin BLDC Rotary
VAPORATOR FAN	TYPE		BLDC (1) With Turbo Type Fan (1)	BLDC (1) With Turbo Type Fan (1)	BLDC (1) With Turbo Type Fan (1)
	AIR VOLUME	CFM (L / M / H)	480 / 547 / 646	480 / 547 / 646	632 / 741 / 904
ONDENSER FAN	MOTOR		BLDC With Axial Type Fan (1)	BLDC With Axial Type Fan (1)	BLDC With Axial Type Fan (1)
	CFM (MAX.)		1,550	2,190	2,219
		WHITE	PC4NUDMAN	PC4NUDMAN	PC4NUDMAN
	CEILING TYPE	BLACK	PC4NBDMAN	PC4NBDMAN	PC4NBDMAN
	(SQUARE)	LXWXH	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.
ASCIA PANEL	_	WEIGHT	7.94 lbs.	7.94 lbs.	7.94 lbs.
SOLD SEPARATELY)		WHITE	PC4NUNMAN	PC4NUNMAN	PC4NUNMAN
	_	BLACK	PC4NBNMAN	PC4NBNMAN	PC4NBNMAN
	OPEN TYPE (CIRCLE)	LXWXH	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.
		WEIGHT	5.95 lbs.	5.95 lbs.	5.95 lbs.
	WIRED CONTROLLER	SIMPLIFIED TOLICH CONTROLLER	MWR-SH00N	MWR-SH00N	MWR-SH00N
	WIRLD CONTROLLER	SIMPLIFIED TOUCH CONTROLLER	MWR-SH10N MWR-WE11N	MWR-SH10N	MWR-SH10N
	THERMOSTAT ADAPTE	PREMIUM W/ SCHEDULING		MWR-WE11N	MWR-WE11N
	WIRELESS CONTROLL		TADPT2	TADPT2	TADPT2
		LK	AR-KH00U	AR-KH00U	AR-KH00U
	WI-FI ADAPTER		MIM-H03UN	MIM-H03UN	MIM-H03UN
	EXTERNAL CONTACT CONTACT		MRW-TA	MRW-TA	MRW-TA
CCECCODIEC	EVIEDNIAL CONTACT	LUNTRUL	MIM-B14	MIM-B14	MIM-B14
CCESSORIES	EXTERNAL CONTACT (			I .	MIM NOT
ACCESSORIES		ITERFACE MODULE FOR CONNECTION DLS (NON-NASA)	MIM-N01	MIM-N01	MIM-N01
CCESSORIES	CENTRAL CONTROL IN	OLS (NON-NASA)	MIM-N01 CKN-250	MIM-N01 CKN-250	CKN-250
ACCESSORIES	CENTRAL CONTROL IN TO DVM PLUS CONTRO WALL BRACKET (FOR	OLS (NON-NASA)  OUTDOOR UNIT)			
accessories	CENTRAL CONTROL IN TO DVM PLUS CONTRO	OLS (NON-NASA)  OUTDOOR UNIT)	CKN-250	CKN-250	CKN-250
Accessories	CENTRAL CONTROL IN TO DVM PLUS CONTRO WALL BRACKET (FOR WIND BAFFLE/GUARD	DLS (NON-NASA) OUTDOOR UNIT) FRONT	CKN-250 WBF-4M	CKN-250 WBF-2M	CKN-250 WBF-2M





 $The AHRI \ Certified @ \ mark \ indicates \ Samsung's \ participation \ in the \ AHRI \ Certification \ program.$  For verification of individual certified products, go to  $\underline{www.ahridirectory.org}.$ 

\*With Wind Baffles

Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.



## CAC 360 CASSETTE

SPECIFICATIONS - 36,000 | 42,000 | 48,000

	INDOOR UNIT		AC036KN4DCH/AA	AC042KN4DCH/AA	AC048KN4DCH/AA
MODEL	OUTDOOR UNIT		AC036JXADCH/AA	AC042JXADCH/AA	AC048JXADCH/AA
		COOLING	36,000 Btu/h	42,000 Btu/h	48,000 Btu/h
	CAPACITY	HEATING	40,000 Btu/h	47,000 Btu/h	53,000 Btu/h
		COOLING	14,000 - 41,000 Btu/h	16,300 - 45,000 Btu/h	18,600 - 51,000 Btu/h
PERFORMANCE	CAPACITY RANGE	HEATING	11,500 - 48,000 Btu/h	13,400 - 50,000 Btu/h	15,300 - 55,000 Btu/h
	SEER / EER		20.70 / 12.00	19.70 / 10.00	19.00 / 8.90
	COP		3.40	3.04	3.20
	HSPF		9.7	9.5	9.5
		~ / \/ /    -	1/208-230/60	1/208-230/60	1/208-230/60
POWER	VOLTAGE Ø / V / Hz  MAX. BREAKER		35 A	35 A	35 A
POWER	MIN. CIRCUIT AMPACI	TV	22.08 A	22.08 A	22.08 A
	MIN. CIRCUIT AMPACI				
	WXHXD	INDOOR	37 1/4 X 14 3/8 X 37 1/4 in.	37 1/4 X 14 3/8 X 37 1/4 in.	37 1/4 X 14 3/8 X 37 1/4 in.
DIMENSIONS		OUTDOOR	37 X 48 X 13 in.	37 X 48 X 13 in.	37 X 48 X 13 in.
	WEIGHT	INDOOR	52.91 lbs.	52.91 lbs.	52.91 lbs.
		OUTDOOR	194 lbs.	194 lbs.	194 lbs.
SOUND PRESSURE LEVEL	INDOOR	L/M/H	32 / 38 / 43 dB(A)	34 / 39 / 44 dB(A)	35 / 40 / 45 dB(A)
SOOND PRESSURE LEVEL	OUTDOOR	COOLING / HEATING (HIGH)	49 / 51 dB(A)	51 / 53 dB(A)	53 / 55 dB(A)
		COOLING	(0*) 23 ≤ T ≤ 115°F	(0*) 23 ≤ T ≤ 115°F	(0*) 23 ≤ T ≤ 115°F
OPERATING TEMPERATURE	OUTDOOR	HEATING	-4≤T≤76°F	-4≤T≤76°F	-4≤T≤76°F
		HIGH SIDE (FLARE)	3/8 in.	3/8 in.	3/8 in.
	INDOOR & OUTDOOR	LOW SIDE (FLARE)	5/8 in.	5/8 in.	5/8 in.
PIPE CONNECTIONS	MAX. LINE SET LENGT		246 ft.	246 ft.	246 ft.
FIFE COMMECHIONS	MAX. VERTICAL SEPARATION		98 ft.	98 ft.	98 ft.
	CONDENSATE CONNE		11/4 in. OD, 1 in. ID	11/4 in. OD, 1 in. ID	11/4 in. OD, 1 in. ID
		enon.	<u> </u>	,	,
	TYPE		R410A	R410A	R410A
REFRIGERANT	FACTORY CHARGE		98.77 oz.	98.77 oz.	98.77 oz.
	CHARGED FOR		25 ft.	25 ft.	25 ft.
COMPRESSOR	TYPE		Inverter Driven, Twin BLDC Rotary	Inverter Driven, Twin BLDC Rotary	Inverter Driven, Twin BLDC Rotary
EVAPORATOR FAN	TYPE		BLDC (1) With Turbo Type Fan (1)	BLDC (1) With Turbo Type Fan (1)	BLDC (1) With Turbo Type Fan (1)
	AIR VOLUME	CFM (L / M / H)	710 / 943 / 1,179	745 / 981 / 1,218	822 / 1,024 / 1,257
CONDENSER FAN	MOTOR		BLDC With Axial Type Fan (2)	BLDC With Axial Type Fan (2)	BLDC With Axial Type Fan (2)
CONDENSER FAN	CFM (MAX.)		3,040	3,040	3,040
		WHITE	PC4NUDMAN	PC4NUDMAN	PC4NUDMAN
	CEILING TYPE (SQUARE)  OPEN TYPE (CIRCLE)	BLACK	PC4NBDMAN	PC4NBDMAN	PC4NBDMAN
		LXWXH	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.
FASCIA PANEL		WEIGHT	7.94 lbs.	7.94 lbs.	7.94 lbs.
(SOLD SEPARATELY)		WHITE	PC4NUNMAN	PC4NUNMAN	PC4NUNMAN
		BLACK	PC4NBNMAN	PC4NBNMAN	PC4NBNMAN
		LXWXH	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.
		WEIGHT	5.95 lbs.	5.95 lbs.	5.95 lbs.
		SIMPLIFIED	MWR-SH00N	MWR-SH00N	MWR-SH00N
	WIRED CONTROLLER	SIMPLIFIED TOUCH CONTROLLER	MWR-SH10N	MWR-SH10N	MWR-SH10N
		PREMIUM W/ SCHEDULING	MWR-WE11N	MWR-WE11N	MWR-WE11N
	THERMOSTAT ADAPT		TADPT2	TADPT2	TADPT2
	WIRELESS CONTROLLER		AR-KH00U	AR-KH00U	AR-KH00U
	WIRELESS CONTROLL		7.11.11.1000	7.11.11.1000	
			MIM-H03UN	MIM-H03UN	MIM-H03IIN
	WI-FI ADAPTER		MIM-H03UN MRW-TA	MIM-H03UN MRW-TA	MIM-H03UN MRW-TA
ACCESSORIES	WI-FI ADAPTER EXTERNAL TEMPERAT	URE SENSOR	MRW-TA	MRW-TA	MRW-TA
ACCESSORIES	WI-FI ADAPTER EXTERNAL TEMPERAT EXTERNAL CONTACT (	URE SENSOR CONTROL			
accessories	WI-FI ADAPTER EXTERNAL TEMPERAT EXTERNAL CONTACT (	TURE SENSOR CONTROL ITERFACE MODULE FOR CONNECTION	MRW-TA	MRW-TA	MRW-TA
ACCESSORIES	WI-FI ADAPTER EXTERNAL TEMPERAT EXTERNAL CONTACT ( CENTRAL CONTROL IN	TURE SENSOR CONTROL ITERFACE MODULE FOR CONNECTION DLS (NON-NASA)	MRW-TA MIM-B14	MRW-TA MIM-B14	MRW-TA MIM-B14
ACCESSORIES	WI-FI ADAPTER EXTERNAL TEMPERAT EXTERNAL CONTACT ( CENTRAL CONTROL IN TO DVM PLUS CONTRI WALL BRACKET (FOR	URE SENSOR  CONTROL  ITERFACE MODULE FOR CONNECTION DLS (NON-NASA)  OUTDOOR UNIT)	MRW-TA MIM-B14 MIM-N01	MRW-TA MIM-B14 MIM-N01	MRW-TA MIM-B14 MIM-N01
ACCESSORIES	WI-FI ADAPTER EXTERNAL TEMPERAT EXTERNAL CONTACT ( CENTRAL CONTROL IN TO DVM PLUS CONTRO	URE SENSOR  CONTROL  ITERFACE MODULE FOR CONNECTION DLS (NON-NASA)  OUTDOOR UNIT)	MRW-TA MIM-B14 MIM-N01 CKN-250	MRW-TA MIM-B14 MIM-N01 CKN-250	MRW-TA MIM-B14 MIM-N01 CKN-250
ACCESSORIES	WI-FI ADAPTER EXTERNAL TEMPERAT EXTERNAL CONTACT OF CONTROL IN TO DVM PLUS CONTROL WALL BRACKET (FOR WIND BAFFLE/GUARE	TURE SENSOR  CONTROL  ITERFACE MODULE FOR CONNECTION  DLS (NON-NASA)  OUTDOOR UNIT)  FRONT	MRW-TA MIM-B14 MIM-N01 CKN-250 WBF-1M2	MRW-TA MIM-B14 MIM-N01 CKN-250 WBF-1M2	MRW-TA MIM-B14 MIM-N01 CKN-250 WBF-1M2





 $The AHRI \ Certified @ \ mark \ indicates \ Samsung's \ participation \ in the \ AHRI \ Certification \ program.$  For verification of individual certified products, go to  $\underline{www.ahridirectory.org}.$ 

\*With Wind Baffles


Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.



## DVM S 360 CASSETTE

SPECIFICATIONS - 9,000 | 12,000 | 18,000

MODEL	INDOOR UNIT		AM009KN4DCH/AA	AM012KN4DCH/AA	AM018KN4DCH/AA
DEDECOMANCE	CADACITY	COOLING	9,000 Btu/h	12,000 Btu/h	18,000 Btu/h
PERFORMANCE	CAPACITY	HEATING	10,000 Btu/h	13,500 Btu/h	20,000 Btu/h
	VOLTAGE	Ø, V, Hz	1/208-230/60	1/208-230/60	1/208-230/60
POWER	POWER INPUT (NOMINAL)	COOLING / HEATING	26 / 26 W	26 / 26 W	26 / 26 W
	CURRENT INPUT (NOMINAL)	COOLING / HEATING	0.18 / 0.18 A	0.18 / 0.18 A	0.18 / 0.18 A
DIMENSIONS	WXHXD		37 1/4 X 11 1/16 X 37 1/4 in.	37 1/4 X 11 1/16 X 37 1/4 in.	37 1/4 X 11 1/16 X 37 1/4 in.
JIMENSIUNS	WEIGHT		46.3 lbs.	46.3 lbs.	46.3 lbs.
OUND PRESSURE LEVEL	INDOOR	L/M/H	29 / 31 / 33 dB(A)	29 / 31 / 33 dB(A)	29 / 31 / 33 dB(A)
	LIQUID PIPE		1/4 in.	1/4 in.	1/4 in.
PIPE CONNECTIONS	GAS PIPE		1/2 in.	1/2 in.	1/2 in.
	CONDENSATE CONNECTIONS		VP25 (11/4 in. OD, 1 in. ID)	VP25 (1 1/4 in. OD, 1 in. ID)	VP25 (11/4 in. OD, 1 in. ID)
ACCEDICED AND	TYPE		R410A	R410A	R410A
EFRIGERANT	CONTROL METHOD		INTERNAL EEV	INTERNAL EEV	INTERNAL EEV
	TYPE		BLDC With Turbo Fan	BLDC With Turbo Fan	BLDC With Turbo Fan
VAPORATOR FAN	AIR VOLUME	CFM (L / M / H)	494 / 530 / 565	494 / 530 / 565	494 / 530 / 565
	CEILING TYPE (SQUARE)	WHITE	PC4NUDMAN	PC4NUDMAN	PC4NUDMAN
		BLACK	PC4NBDMAN	PC4NBDMAN	PC4NBDMAN
		LXWXH	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.
ASCIA PANEL	_	WEIGHT	7.94 lbs.	7.94 lbs.	7.94 lbs.
SOLD SEPARATELY)		WHITE	PC4NUNMAN	PC4NUNMAN	PC4NUNMAN
	OPEN TYPE (CIRCLE)	BLACK	PC4NBNMAN	PC4NBNMAN	PC4NBNMAN
		LXWXH	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.
	_	WEIGHT	5.95 lbs.	5.95 lbs.	5.95 lbs.
	WIRED CONTROLLER	SIMPLIFIED	MWR-SH00N	MWR-SH00N	MWR-SH00N
		SIMPLIFIED TOUCH CONTROLLER	MWR-SH10N	MWR-SH10N	MWR-SH10N
		PREMIUM W/ SCHEDULING	MWR-WE11N	MWR-WE11N	MWR-WE11N
	WIRELESS CONTROLLER		AR-KH00U	AR-KH00U	AR-KH00U
CCESSORIES	WIFI ADAPTER		MIM-H03UN	MIM-H03UN	MIM-H03UN
	THERMOSTAT AD	APTER (24VAC)	TADPT2	TADPT2	TADPT2
	EXTERNAL TEMPE	RATURE SENSOR	MRW-TA	MRW-TA	MRW-TA
	EXTERNAL CONTA	ACT CONTROL	MIM-B14	MIM-B14	MIM-B14





The AHRI Certified® mark indicates Samsung's participation in the AHRI Certification program. For verification of individual certified products, go to <a href="https://www.ahridirectory.org">www.ahridirectory.org</a>.




 $Samsung\ HVAC\ maintains\ a\ policy\ of\ ongoing\ development, specifications\ are\ subject\ to\ change\ without\ notice.$ 

## DVM S 360 CASSETTE

SPECIFICATIONS - 24,000 | 30,000 | 36,000

MODEL	INDOOR UNIT		AM024KN4DCH/AA	AM030KN4DCH/AA	AM036KN4DCH/AA
DEDECORMANICE	CADACITY	COOLING	24,000 Btu/h	30,000 Btu/h	36,000 Btu/h
PERFORMANCE	CAPACITY	HEATING	27,000 Btu/h	34,000 Btu/h	40,000 Btu/h
	VOLTAGE	Ø, V, Hz	1/208-230/60	1/208-230/60	1/208-230/60
POWER	POWER INPUT (NOMINAL)	COOLING / HEATING	38 / 38 W	54 / 54 W	71 / 71 W
	CURRENT INPUT (NOMINAL)	COOLING / HEATING	0.28 / 0.28 A	0.42 / 0.42 A	0.57 / 0.57 A
DIMENSIONS	WXHXD		37 1/4 X 11 1/16 X 37 1/4 in.	37 1/4 X 14 3/8 X 37 1/4 in.	37 1/4 X 14 3/8 X 37 1/4 in.
DIMENSIONS	WEIGHT		46.3 lbs.	52.91 lbs.	52.91 lbs.
SOUND PRESSURE LEVEL	INDOOR	L/M/H	32 / 35 / 38 dB(A)	36 / 38 / 40 dB(A)	38 / 40 / 43 dB(A)
	LIQUID PIPE		3/8 in.	3/8 in.	3/8 in.
PIPE CONNECTIONS	GAS PIPE		5/8 in.	5/8 in.	5/8 in.
	CONDENSATE CONNECTIONS		VP25 (11/4 in. OD, 1 in. ID)	VP25 (1 1/4 in. OD, 1 in. ID)	VP25 (1 1/4 in. OD, 1 in. ID)
	TYPE		R410A	R410A	R410A
REFRIGERANI	EFRIGERANT  CONTROL METHOD		INTERNAL EEV	INTERNAL EEV	INTERNAL EEV
	TYPE		BLDC With Turbo Fan	BLDC With Turbo Fan	BLDC With Turbo Fan
EVAPORATOR FAN	AIR VOLUME CFM (L / M / H)		512 / 583 / 671	706 / 795 / 901	777 / 883 / 989
	CEILING TYPE (SQUARE)	WHITE	PC4NUDMAN	PC4NUDMAN	PC4NUDMAN
		BLACK	PC4NBDMAN	PC4NBDMAN	PC4NBDMAN
		LXWXH	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.	39 3/8 X 39 3/8 X 2 5/8 in.
FASCIA PANEL		WEIGHT	7.94 lbs.	7.94 lbs.	7.94 lbs.
(SOLD SEPARATELY)	OPEN TYPE (CIRCLE)	WHITE	PC4NUNMAN	PC4NUNMAN	PC4NUNMAN
		BLACK	PC4NBNMAN	PC4NBNMAN	PC4NBNMAN
		LXWXH	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.	41 5/16 X 3 11/16 in.
	_	WEIGHT	5.95 lbs.	5.95 lbs.	5.95 lbs.
	WIRED CONTROLLER	SIMPLIFIED	MWR-SH00N	MWR-SH00N	MWR-SH00N
		SIMPLIFIED TOUCH CONTROLLER	MWR-SH10N	MWR-SH10N	MWR-SH10N
		PREMIUM W/ SCHEDULING	MWR-WE11N	MWR-WE11N	MWR-WE11N
ACCESCODIES	WIRELESS CONTROLLER		AR-KH00U	AR-KH00U	AR-KH00U
ACCESSORIES	WIFI ADAPTER		MIM-H03UN	MIM-H03UN	MIM-H03UN
	THERMOSTAT ADA	APTER (24VAC)	TADPT2	TADPT2	TADPT2
	EXTERNAL TEMPE	RATURE SENSOR	MRW-TA	MRW-TA	MRW-TA
	EXTERNAL CONTA	CT CONTROL	MIM-B14	MIM-B14	MIM-B14





The AHRI Certified® mark indicates Samsung's participation in the AHRI Certification program. For verification of individual certified products, go to <a href="https://www.ahridirectory.org">www.ahridirectory.org</a>.



Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.

## DVM S 360 CASSETTE

SPECIFICATIONS - 48,000

MODEL	INDOOR UNIT	AM048KN4DCH/AA	
PERFORMANCE	CAPACITY	COOLING	48,000 Btu/h
PERFORMANCE	CAPACITY	HEATING	54,000 Btu/h
	VOLTAGE	Ø, V, Hz	1/208-230/60
POWER	POWER INPUT (NOMINAL)	COOLING / HEATING	91 / 91 W
	CURRENT INPUT (NOMINAL)	COOLING / HEATING	0.75 / 0.75 A
DIMENSIONS	WXHXD		37 1/4 X 14 3/8 X 37 1/4 in.
DIFICISIONS	WEIGHT		52.91 lbs.
SOUND PRESSURE LEVEL	INDOOR	L/M/H	39 / 42 / 44 dB(A)
PIPE CONNECTIONS	LIQUID PIPE		3/8 in.
	GAS PIPE		5/8 in.
	CONDENSATE CONN	IECTIONS	VP25 (11/4 in. OD, 1 in. ID)
	TYPE		R410A
REFRIGERANT	CONTROL METHOD		INTERNAL EEV
	TYPE		BLDC With Turbo Fan
EVAPORATOR FAN	AIR VOLUME	CFM (L / M / H)	848 / 954 / 1,112
		WHITE	PC4NUDMAN
	CEILING TYPE	BLACK	PC4NBDMAN
	(SQUARE)	LXWXH	39 3/8 X 39 3/8 X 2 5/8 in.
FASCIA PANEL		WEIGHT	7.94 lbs.
(SOLD SEPARATELY)	OPEN TYPE (CIRCLE)	WHITE	PC4NUNMAN
		BLACK	PC4NBNMAN
	OPEN TYPE (CIRCLE)	LXWXH	41 5/16 X 3 11/16 in.
		WEIGHT	5.95 lbs.
		SIMPLIFIED	MWR-SH00N
	WIRED CONTROLLER	SIMPLIFIED TOUCH CONTROLLER	MWR-SH10N
		PREMIUM W/ SCHEDULING	MWR-WE11N
	WIRELESS CONTROL	LER	AR-KH00U
ACCESSORIES	WIFI ADAPTER		MIM-H03UN
	THERMOSTAT ADAP	TER (24VAC)	TADPT2
	EXTERNAL TEMPERA	ATURE SENSOR	MRW-TA
	EXTERNAL CONTACT	CONTROL	MIM-B14





The AHRI Certified® mark indicates Samsung's participation in the AHRI Certification program. For verification of individual certified products, go to <a href="https://www.ahridirectory.org">www.ahridirectory.org</a>.





# SAMSUNG

SamsungHVAC.com 360BR 12.2017 – V3