

Daikin AURORA 1.5-Ton Wall Mounted Unit FTX18WVJU9RXL18WMVJU9

### **FEATURES**

- Hot start technology
- Auto-restart (after power failure)
- IR controller included

## **INDOOR UNIT**



### **BENEFITS**

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range Cooling (50°F 114.8°F)
- Operating Range Heating (-13°F 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications

### **OUTDOOR UNIT**





Daikin AURORA 1.5-Ton Wall Mounted Unit FTX18WVJU9RXL18WMVJU9

| SYSTEM PERFORMANCE                 |                |                                  |  |
|------------------------------------|----------------|----------------------------------|--|
| Indoor Unit Model No.              | FTX18WVJU9     | Indoor Unit Name:                | 1.5 Ton Wall Mounted Daikin<br>AURORA Indoor Unit              |
| Outdoor Unit Model No.             | RXL18WMVJU9    | Outdoor Unit Name:               | 19.5 SEER2, Heat Pump, Ductless<br>ODU, 1.5 Ton, Daikin AURORA |
| Rated Cooling Capacity (Btu/hr):   | 18,000         | Rated Cooling Conditions:        | Indoor (°F DB/WB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75      |
| Sensible Capacity (Btu/hr):        |                | Rated Piping Length(ft):         | 25   |
| Max/Min Cooling Capacity (Btu/hr): | 21,600 / 9,000 | Rated Height Difference (ft):    | 0.00   |
| Cooling Input Power (kW):          |                |                                  |  |
| SEER2 (Non-Ducted/Ducted):         | 19.80 /        | HSPF2 (Non-Ducted/Ducted):       | 8.5 /  |
| EER2 (Non-Ducted/Ducted):          | 11.50 /        | Heating COP (Non-Ducted/Ducted): | 3.3 /  |
| Rated Heating Capacity (Btu/hr):   | 21,600         | Rated Heating Conditions:        | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43      |
| Max/Min Heating Capacity (Btu/hr): | 28,000 / 9,000 |                                  |  |


| SYSTEM DETAILS                         |        |                                   |          |
|--|--------|-----------------------------------|----------|
| Refrigerant Type:                      | R-410A | Cooling Operation Range (°F DB):  | 50 - 115 |
| Holding Refrigerant Charge (lbs):      | 3.53   | Heating Operation Range (°F WB):  | -13 - 60 |
| Additional Charge (oz/ft):             | 0.32   | Max. Pipe Length (Vertical) (ft): | 66       |
| Pre-charge Piping (Length) (ft):       | 33     | Cooling Range w/Baffle (°F DB):   | -        |
| Max. Pipe Length (Total) (ft):         | 99     |                                   |          |
| Max Height Separation (Ind to Ind ft): | 0      |                                   |          |



Daikin AURORA 1.5-Ton Wall Mounted Unit FTX18WVJU9RXL18WMVJU9

| INDOOR UNIT DETAILS                      |                            |                                  |                 |
|--|----------------------------|----------------------------------|-----------------|
| Power Supply (V/Hz/Ph):                  | 208/230 / 60 / 1           | Airflow Rate (H/M/L/SL) (CFM):   | 583/484/385/360 |
| Power Supply Connections:                | L1, L2, L3, Ground         | Moisture Removal (Gal/hr):       |                 |
| Min. Circuit Amps MCA (A):               |                            | Gas Pipe Connection (inch):      | 1/2             |
| Max Overcurrent Protection (MOP) (A):    |                            | Liquid Pipe Connection (inch):   | 1/4             |
| Dimensions (HxWxD) (in):                 | 13-3/8 x 41-5/16 x 10-3/16 | Condensate Connection (inch):    | 5/8             |
| Net Weight (lb):                         | 33                         | Sound Pressure (H/M/L/SL) (dBA): | 46/41/36/33     |
| Ext. Static Pressure (Rated/Max) (inWg): | 1                          | Sound Power Level (dBA):         |                 |

## **DIMENSIONAL DRAWING - INDOOR UNIT**

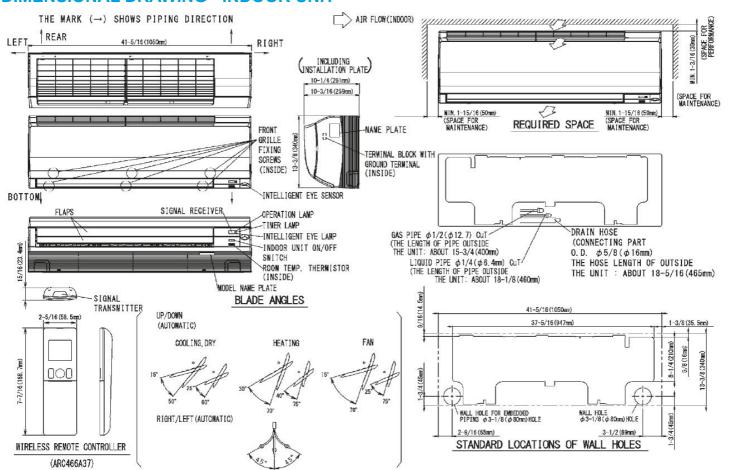

C: 3D123379

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484




Daikin AURORA 1.5-Ton Wall Mounted Unit FTX18WVJU9RXL18WMVJU9

| OUTDOOR UNIT DETAILS                  |                            |                                |          |
|---------------------------------------|----------------------------|--------------------------------|----------|
| Power Supply (V/Hz/Ph):               | 208/230 V 254/277 / 60 / 1 | Compressor Stage:              | Inverter |
| Power Supply Connections:             | L1, L2, L3, Ground         | Capacity Control Range (%):    | -        |
| Min. Circuit Amps MCA (A):            | 18.6                       | Airflow Rate (H) (CFM):        | 2419     |
| Max Overcurrent Protection (MOP) (A): |                            | Gas Pipe Connection (inch):    | 1/2      |
| Max Starting Current MSC(A):          |                            | Liquid Pipe Connection (inch): | 1/4      |
| Rated Load Amps RLA(A):               |                            | Sound Pressure (H) (dBA):      | 54       |
| Dimensions (HxWxD) (in):              | 28-15/16 x 34-1/4 x 12-5/8 | Sound Power Level (dBA):       |          |
| Net Weight (lb):                      | 132                        |                                |          |

## **DIMENSIONAL DRAWING - OUTDOOR UNIT**

### RX15/18WMVJU9

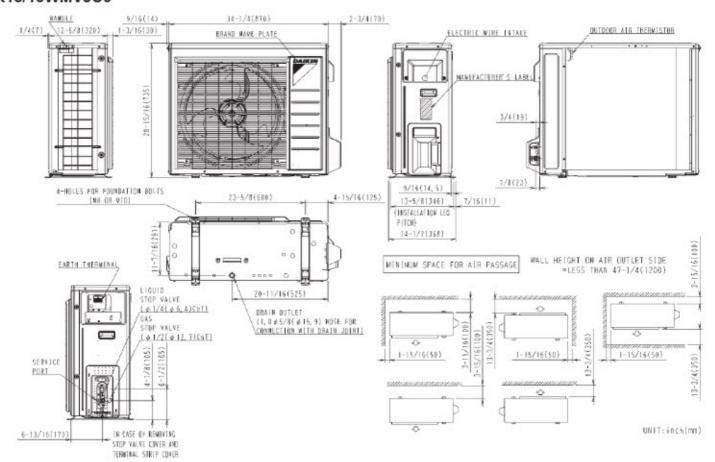

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484



Daikin AURORA 1.5-Ton Wall Mounted Unit FTX18WVJU9RXL18WMVJU9

## **INDOOR ACCESSORIES**

| PART          |
|---------------|
| <b>NUMBER</b> |

# **DESCRIPTION**

## **INCLUDED**

| AZAI6WSCDKB    | DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21) | No |
|----------------|---|----|
| AZAI6WSPDKC    | DKN Plus Interface  | No |
| BRCW901A03     | BRC944B2 CONTROL CABLE, 10FT  | No |
| BRCW901A08     | Wired Remote Controller Cord - 8m/26ft                                      | No |
| DACA-CP1-1     | Mini Aqua Condensate Pump   | No |
| DACA-CP4-1     | MINI WHITE PUMP KIT 100-250V  | No |
| DTST-LTE-LA-A  | Daikin One Lite (with Translation Adaptor for S21 only)                     | No |
| DTST-ONE-ADA-A | Daikin One+ Smart Thermostat for VRV, SkyAir, Single- and Multi-Zone System | No |
| KAF970A46      | Titanium apatite photocatalytic air-purifying filter WITHOUT frame          | No |
| KRP928BB2S     | RA Interface Adaptor for DIII-Net -   | No |
|                |   |    |

## OUTDOOR ACCESSORIES

| PAI | RT |    |
|-----|----|----|
| NU  | MB | ER |

## **DESCRIPTION**

# **INCLUDED**

| DACA-WB-3  | Powder-Coated Wall-Mounted Bracket          | No |
|------------|---|----|
| FTDBHML    | Daikin Bml Drainpan Htr Large               | No |
| KEH063A4E  | Daikin BML DrainPan Heater Large            | No |
| KEH063A4EA | Bml LRg Drain Pan Heater Rev A              | No |
| KKG063A42  | Back protection wire net                    | No |
| KPS063A41  | Snow hood (intake side plate) (15, 18 & 24) | No |
| KPS063A44  | Snow hood (intake rear plate) (15,18 & 24)  | No |
| KPS063A47  | Snow hood (outlet) (15, 18 & 24)            | No |
| KPW063B4   | Air direction adjustment grille             | No |
|            |   |    |

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

Page 5 of 5

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)