

SUBMITTAL - 18KUAS1U

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **AUUh18KUAS**

Outdoor Unit: **AOUH18KUAS1**



FEATURES

INDOOR UNIT:

- Circular-Flow cassette indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 28dB
- Multiple fan speed options; Auto, High, Med, Low, and Quiet
- Special Operation modes available:
 - Economy Mode/ Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Seamless control using the optional IR Receiver and Wireless Remote Controller kit
 - Optional Wi-Fi connectivity enables remote monitoring through the Airstage Mobile App
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with Building Management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Built-in drain pump for efficient water removal making installation and maintenance easier
- Optional fresh air kit, designed to boost indoor air quality and comfort
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Multiple Auxiliary Heat logic for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)
 - Optional human sensor detects room occupancy to enhance energy savings.
 - Offers group control, allowing seamless management of multiple units simultaneously.
 - Cassette Grille option available in sleek white and bold black colors to perfectly complement any space

OUTDOOR UNIT:

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Compact outdoor unit with extended line set lengths up to 98ft (30m)
- Up to 20% higher rated heating capacity than nominal capacity



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250409A

SUBMITTAL - 18KUAS1U

SPECIFICATIONS:

Indoor Unit					AUUH18KUAS			
Outdoor Unit					AOUH18KUAS1			
System Name					18KUAS1U			
AHRI Number					215434552			
SEER2		Cooling			Btu/hW	26.3		
EER2						13.6		
HSPF 2 (IV) / HSPF 2 (V)		Heating			kW/kW	11.4 / 8.8		
COP2						3.8		
Outdoor Operation Range		Cooling			°F (°C)	-5 to 122*8 (-21 to 50*8)		
		Heating				-5 to 75 (-21 to 24)		
Indoor Capacity		Cooling		Rated	Btu/h	18000		
				Min.—Max.		3,100—20,100		
		Heating	47°FDB (Outdoor temp.)	Rated		21600		
			17°FDB (Outdoor temp.) ^{*1}	Min.—Max.		3,100—25,600		
				Rated		14400		
			5°FDB (Outdoor temp.) ^{*2}	Max.		19300		
				Rated		17100		
				Max.				
Outdoor Connection pipe		Size	Liquid		in (mm)	Ø1/4 (Ø6.35)		
			Gas			Ø1/2 (Ø12.70)		
		Method				FLARE		
		Pre-charge length				ft (m)	66 (20)	
		Min. length					16 (5)	
		Max. length					98 (30)	
		Max. height difference					49 (15)	
Indoor Dimensions (H × W × D)		Net		in (mm)	9-11/16 × 33-1/16 × 33-1/16 (246 × 840 × 840)			
		Gross			11-3/4 × 37-3/8 × 38-3/16 (298 × 950 × 970)			
Indoor Weight		Net		lb (kg)	53 (24)			
		Gross			64 (29)			
Outdoor Dimensions (H × W × D)		Net		in (mm)	24-7/8 × 31-7/16 × 11-7/16 (632 × 799 × 290)			
		Gross			27-1/4 × 37 × 14-3/4 (692 × 940 × 375)			
Outdoor Weight		Net		lb (kg)	84 (38)			
		Gross			93 (42)			
Indoor Fan		Airflow rate	Cooling	High	CFM (m³/h)	618 (1,050)		
				Med		565 (960)		
				Low		530 (900)		
				Quiet		459 (780)		
		Heating	High	618 (1,050)				
			Med	565 (960)				
			Low	530 (900)				
			Quiet	459 (780)				
		Type × Qty				TURBO FAN × 1		
		Motor output				W	81	
Outdoor Fan		Airflow rate	Cooling		CFM (m³/h)	1,318 (2,240)		
			Heating			1,154 (1,960)		
		Type × Qty				PROPELLER FAN × 1		
		Motor output				W	49	
Indoor Sound Pressure Level ^{*4}		Cooling		High	dB (A)	34		
				Med		32		
				Low		31		
				Quiet		28		
		Heating		High		34		
				Med		32		
				Low		31		
				Quiet		28		
Outdoor Sound Pressure Level ^{*4}		Cooling			52			
		Heating			55			

SUBMITTAL - 18KUAS1U

SPECIFICATIONS:

Outdoor Refrigerant		Type		R32		
		Charge	lb oz	2 lb 12 oz		
			g	1250		
Additional Charge Calculation			oz/ft	0.22		
			g/m	20		
Outdoor Refrigerant Oil		Type		RMM68AF		
		Amount	in ³ (cm ³)	24.4 (400)		
Indoor Moisture removal			pints/h (L/h)	3.6 (1.7)		
Indoor Drain hose		Material		POLYVINYL CHLORIDE		
		Tip Diameter		Ø13/16 (Ø20.7) (I.D.), Ø1-1/16 (Ø26.6) (O.D.)		
Indoor Operation range		Cooling	°F (°C)	64 to 90 (18 to 32)		
			%RH	80 or less		
		Heating	°F (°C)	60 to 86 (16 to 30)		
Power Supply				208/230 V~ 60 Hz		
Available Voltage Range				187—253		
System power supply		Voltage		V		
		Frequency		Hz		
		Available voltage range		V		
Indoor Current	Cooling		A	5.9		
	Heating			7.5		
Maximum Operating Current ^{*3}		Cooling		12.2		
		Heating		14.8		
Outdoor Starting Current				7.5		
MCA ^{*5}				14.8		
Wiring spec. ^{*6}				20		
Indoor Input Power	Cooling			kW	1.32	
	Min.—Max.		0.18—1.94			
	Heating	47°FDB (Outdoor temp.)	Rated		1.66	
			Min.—Max.		0.14—2.70	
		17°FDB (Outdoor temp.) ^{*1}	Rated		1.4	
			Max.		2.34	
			5°FDB (Outdoor temp.) ^{*2}		Rated	2.2
					Max.	
Indoor Power Factor	Cooling		%	97.3		
	Heating			96.2		
Energy Star ^{*9}				ES, ESCC, ESME		

NOTES:

- Cooling: Indoor temperature of 80°F (26.6°CDB)/67°F WB (19.44°CWB), and outdoor temperature of 95°F DB (35°CDB)/75°F WB (23.9°CWB).
- Heating: Indoor temperature of 70°F DB (21.11°CDB)/60°F WB (15.56°CWB), and outdoor temperature of 47°F DB (8.33°CDB)/43°F WB (6.11°CWB).
- 17°F DB (Outdoor temp.),
- 5°F DB (Outdoor temp.)
- *1: Heating (17°F): Indoor temperature of 70°F DB (21.11°CDB)/60°F WB (15.56°CWB), and outdoor temperature of 17°F DB (-8.33°CDB)/15°F WB (-9.44°CWB).
- *2: Heating (5°F): Indoor temperature of 70°F DB (21.11°CDB)/60°F WB (15.56°CWB), and outdoor temperature of 5°F DB (-15.0°CDB)/4°F WB (-15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.
- *4:
- Indoor Sound Pressure Level, Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level — Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- *3:
- Maximum Operating Current — Maximum current is maximum value when operated within the operation range.
- The total current of indoor unit and outdoor unit.
- MCA — *5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)
- *6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.
- Wiring spec. As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.
- MAX. CKT. BKR — *7: Maximum Circuit Breaker
- Operation Range — *8: Suction temperature of the outdoor unit.
- Energy Star — *9: ES = Energy Star, ESCC = Energy Star Cold Climate, ESME = Energy Star Most Efficient.

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

SUBMITTAL - 18KUAS1U

ACCESSORIES:

Model Number	Description
UTY-RVRU	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5	Touch Panel Wired Remote Controller
UTY-RHRY	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY	Simple Wired Remote (With Mode Function)
UTY-LBTUC	IR Receiver Kit w/ Wireless Remote Controller (Circular Flow Cassettes)
UTY-TFSXJ4	Wi-Fi adapter (WiFi Interface Module UART Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA ^{*1}	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA ^{*1}	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA ^{*1}	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX	External Switch Controller
UTY-TTRXZ1 ^{*2}	24V Thermostat Interface
TTRXZ1-KIT ^{*2}	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WiFi Plug & 24V Transformer)
UTY-SHZXC	Human Sensor Kit
UTY-XCSX	External input and output PCB
UTY-XWZXZG	External Connect Kit
UTZ-GXRA	External input and output PCB box
UTZ-KXRA	High Humidity Insulation Kit
UTZ-VXRA	Fresh Air Intake Kit
UTR-YDZK	Air outlet shutter plate
UTY-DSGYZ2 ^{*3}	Airstage Edge Controller
UTZ-DUHGG2A	Hail Guard
UTZ-DUSHG2A	Snowhood
UTZ-DUWBG2A	Wind Baffle
UTG-LCGVCW	Cassette Grille (White)
UTG-LCGVCB	Cassette Grille (Black)

NOTES:

*1 -Requires IR receiver kit UTY-LBTUC to connect this device to IDU.


*2 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

*3 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

SUBMITTAL - 18KUAS1U

INDOOR UNIT DIMENSIONS:


Unit: in (mm)

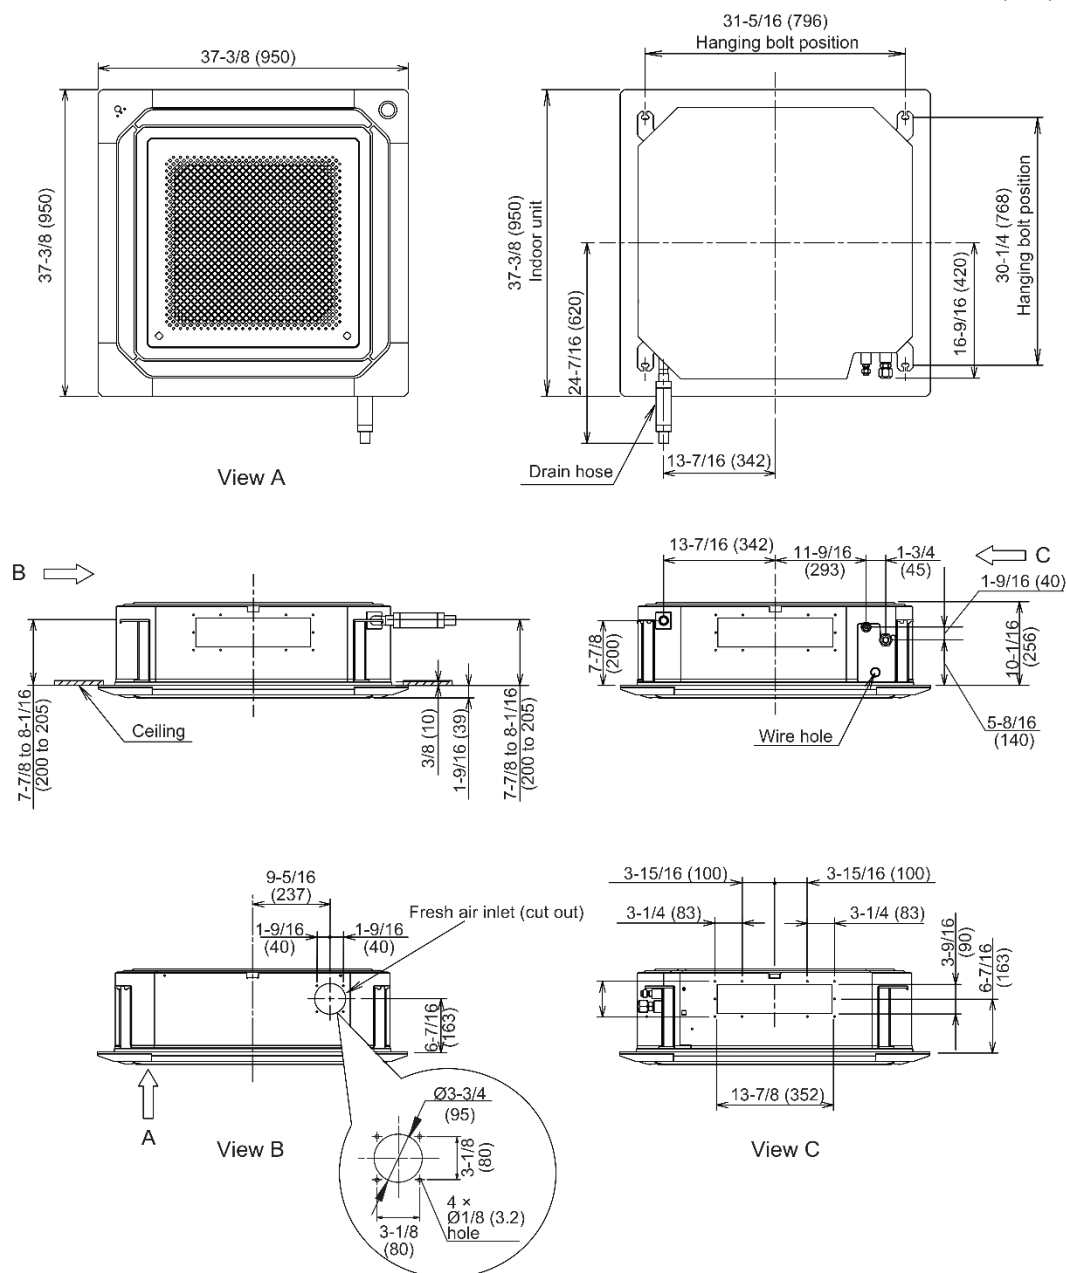


SUBMITTAL - 18KUAS1U

OUTDOOR UNIT DIMENSIONS:


Unit: in (mm)

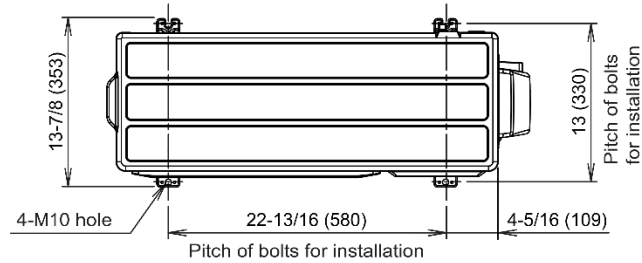


Top view

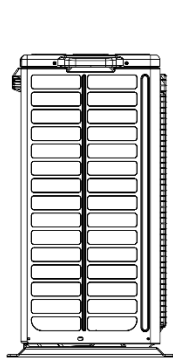


Side view

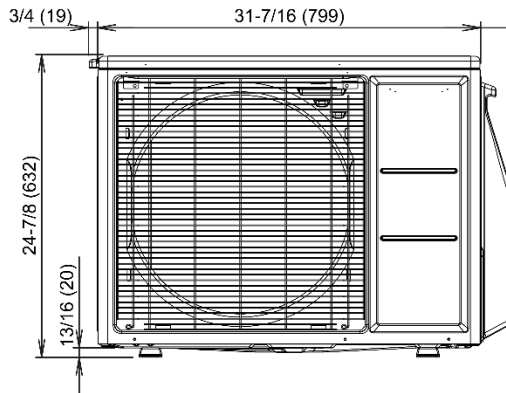


Front view

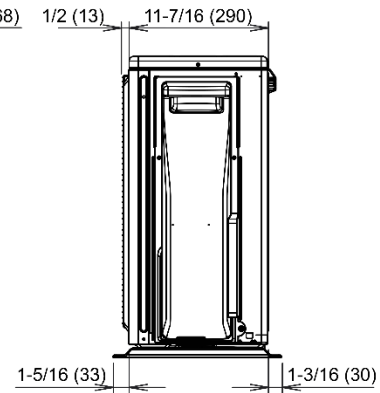

Side view

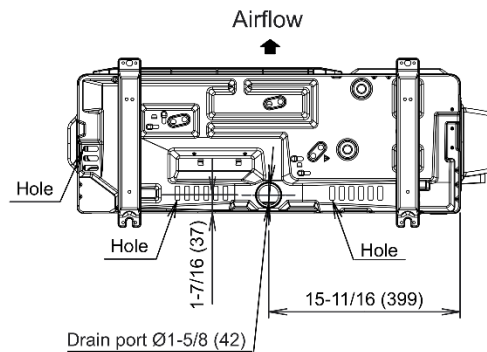

Bottom view

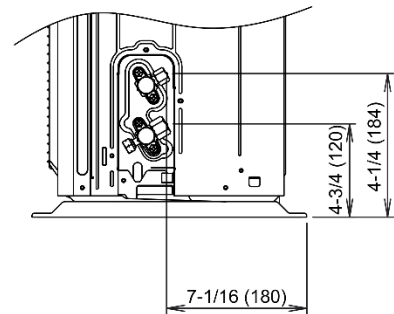

Side view (Valve part)