

SAMSUNG

Submittal Data

PC1MWFUNW, PC1NWFUNW, PC1BWFUNW

Fasic Panel for WindFree™* 1-Way Cassette Indoor Units

Job name: _____ Location: _____
 Purchaser: _____ Engineer: _____
 Submitted to: _____ Reference Approval Construction
 Unit designation: _____ Schedule #: _____

Model Number	Description
PC1MWFUNW	WindFree™* 1-Way Cassette Fascia panel - Small
PC1NWFUNW	WindFree™* 1-Way Cassette Fascia panel - Medium
PC1BWFUNW	WindFree™* 1-Way Cassette Fascia panel - Large


Specifications

- Fascia panel for Samsung WindFree™* 1-Way Cassette indoor units
- The fascia panel shall include an integral Wi-Fi adapter as standard for indoor unit remote monitoring and control via Samsung SmartThings (R32 models and R410A CAC models that support single Wi-Fi adapter connection).
- HIPS chassis certified to UL94 V0
- 1 X motorized, auto swing louver
- Built-in IR receiver for optional wireless control (purchased separately).
- LED status display
- The panel shall include 2 X washable, pleated filter and all necessary mounting hardware as standard.
- Fascia panel is powered and controlled by the indoor unit PCB

Dimensions

PC1MWFUNW	L X W X H (inches)	37 13/16 X 16 1/2 X 1 3/8
	Weight (lbs.)	5.73
PC1NWFUNW	L X W X H (inches)	47 3/16 X 19 11/16 X 1 3/8
	Weight (lbs.)	9.5
PC1BWFUNW	L X W X H (inches)	55 1/2 X 4.75 X 1 3/8
	Weight (lbs.)	11

Open Type

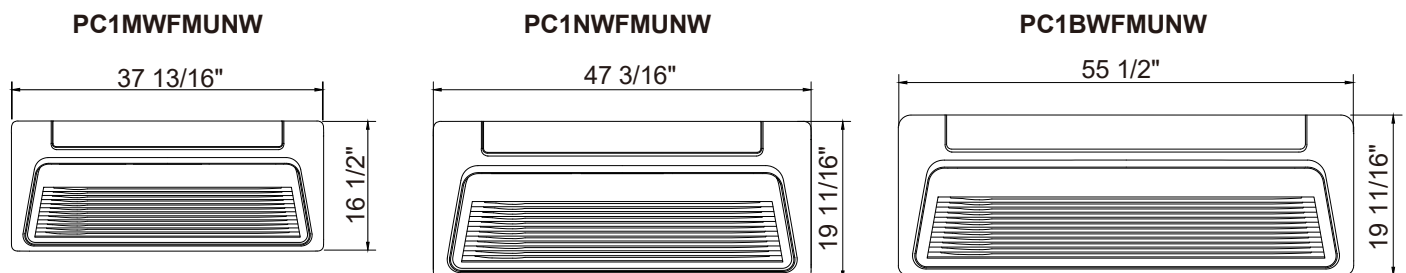

*The WindFree™ unit delivers an air current that is under 0.15 m/s while in WindFree™ mode. Air velocity that is below 0.15 m/s is considered "still air" as defined by ASHRAE (American Society of Heating, Refrigerating, and Air Conditioning Engineers).

Samsung HVAC maintains a policy of ongoing development. Specifications are subject to change without notice.