

3.0-Ton, 4-Port Heat Pump, Ductless ODU 4MXS36WMVJU9

FEATURES

High-efficiency inverter driven swing compressor

BENEFITS

12 Year limited parts warranty with online registration





3.0-Ton, 4-Port Heat Pump, Ductless ODU 4MXS36WMVJU9

EFFICIENCY				PERFORMANCE				
	SEER2	EER2	HSPF2	СОР	COOLING:		HEATING:	
Non-Ducted:	18.10	9.20	9.40	4.50	Rated (Btu/hr):	36,000	Rated (Btu/hr):	36,000
Ducted:	14.90	8.00	7.80	3.10	Operating Range:	14°F - 115°F	Operating Range:	5°F - 60°F
Mixed:	16.50	8.60	8.60	3.80	Rated Cooling Conditions: Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75		Rated Heating Conditions:	
							Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43	

ELECTRICAL		PIPING			
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Max. System Piping Length: (feet):	1	Gas Conn. (inch):	3/8
System MCA: (Min.circuit amps)	20.9	Max. Interunit Piping Length: (feet):	1	Liquid Conn. (inch):	1/4
System MFA: (Max.fuse amps)	25.0	Max. Height Difference IDU to ODU (feet):	2	Drain Conn. (inch):	5/8
Compressor RLA: (Rated load amps)	17.5	Max. Height Difference IDU to IDU (feet):	3		
Outdoor fan motor FLA: (Full load amps)	0.5	Refrigerant Pre-Charged Pipe Length (ft):	131.2		
Outdoor fan motor W: (Rated output watts)					

SPECIFICATIONS				
Compressor Type: Swing		Compressor Stage:	Inverter	
Refrigerant Type:		Refrigerant Oil:	PVE (FVC50K)	
Factory Charge (Lbs): 6.17		Additional Refrigerant Charge (Ozs/ft):	0.21	
COOLING - A	Airflow Rate (cfm):	HEATING - Air	flow Rate (cfm):	
High:	2,611	High:	2,352	
Med:	2,438	Med:	2,209	
Low:	2,094	Low:	1,118	
Sound Level (dBA):	54	Sound Level (dBA):	56	
Dimensions (HxWxD) (in):	28-15/16 x 34-1/4 x 12-5/8	Net Weight (lb):	144	

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484

www.daikinac.com www.daikincomfort.com

Page 2 of 4

Daikin City Generated Submittal Data

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


Submittal Date: 3/17/2024 5:34:27 AM



3.0-Ton, 4-Port Heat Pump, Ductless ODU 4MXS36WMVJU9

DIMENSIONAL DRAWING

4MXS36WMVJU9

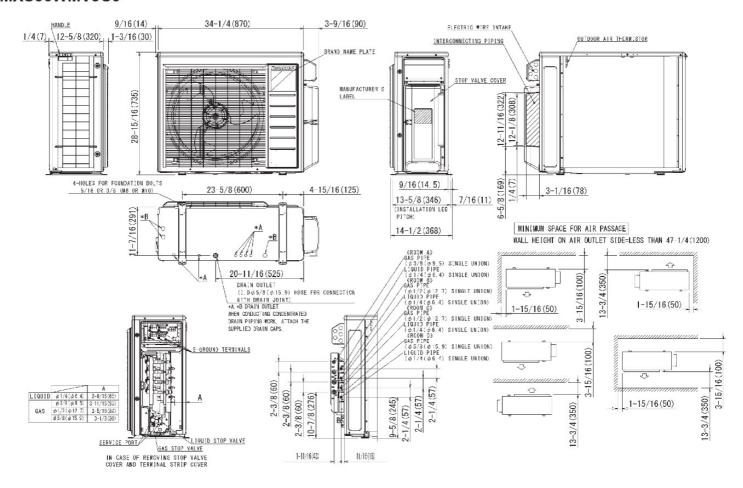



3.0-Ton, 4-Port Heat Pump, Ductless ODU 4MXS36WMVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH063A4EA	Bml LRg Drain Pan Heater Rev A	No
KKG063A42	Back protection wire net	No
KKG063A43	Side protection wire net (18 & 24)	No
KPS063A41	Snow hood (intake side plate) (15, 18 & 24)	No
KPS063A44	Snow hood (intake rear plate) (15,18 & 24)	No
KPS063A47	Snow hood (outlet) (15, 18 & 24)	No
KPW063B4	Air direction adjustment grille	No
RAQAHLGD1	Rear Coil Guard BML	No

Page 4 of 4