


Z-Flex

Available in
sizes 3" to 24"
single and double wall

SPECIAL GAS VENT FOR
CATEGORY II, III, IV HEATING EQUIPMENT

Z-Vent

designed for use with
boilers, high efficiency
furnaces, pool heaters,
unit heaters and tankless
water heaters.

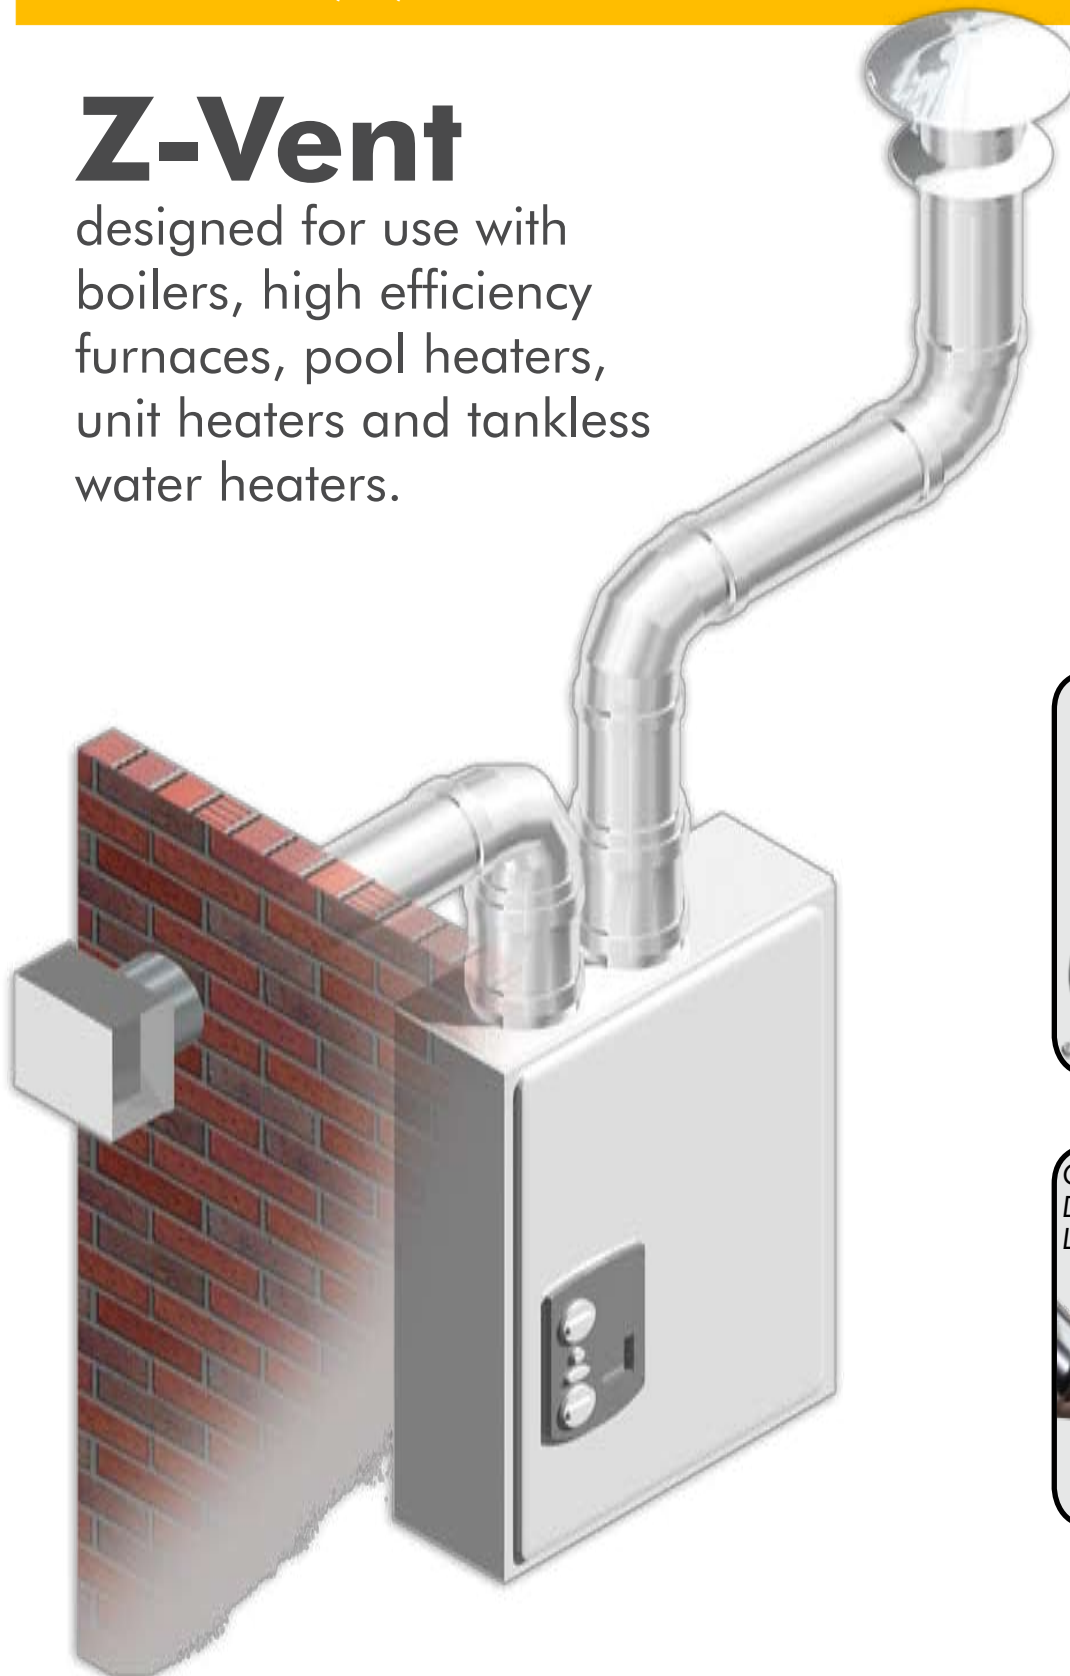

CUT TO
LENGTH
IN THE
FIELD



GAS-TIGHT
DOUBLE
LIP SEAL




c  US LISTED

Z-Vent is manufactured using AL29-4® advanced ferritic stainless steel** with unmatched corrosion resistance for use with condensing furnaces and boilers. Z-Vent was developed in the early 1980's and has thousands of field installations to date. Z-Vent is now manufactured utilizing a fail-safe gasket connection. No sealant required.

The lengths of pipe may be cut on non-expanded end using aviation snips or a hacksaw (24tpi). The cut end must be filed or sanded smooth before joining.




45 DEGREE ELBOW




Catalogue No	Size	A	B	C
02SVEEWC0345	3"	3"	8.25"	5.5"
02SVEEWC0445	4"	4"	7"	5.7"

HORIZONTAL DRAINPIPE



Catalogue No	Size	A	B
02SVEDWC	3"	3"	8.5"
02SVEDWC	4"	4"	10.5"

90 DEGREE ELBOW



Catalogue No	Size	A	B	C
02SVEEWC0345	3"	3"	8.25"	5.5"
02SVEEWC0445	4"	4"	7"	5.7"

GAS VENT PIPE




Catalogue No	Size	A
02SVPWC03	3"	3"
02SVPWC04	4"	4"

WALL TERMINATION



Catalogue No	Size	A	B	C
02SVSRTX03	3"	3"	4"	5"
02SVSRTX04	4"	4"	4"	6"

VERTICAL DRAIN/TEE



Catalogue No	Size	A	B
02SVEVWC03	3"	3"	7.5"
02SVEVWC04	4"	4"	7.5"

Features:

Gasketed connections

The highest pressure rating in the industry

Fusion welded pipe seams

The only metallic special gas vent than can be cut to length on site

1" clearance to combustibles

Benefits:

No sealant required. Immediate start up, no call backs

More than 3 times the industry standard

Provides an air-tight seam, smooth finish and a better fit


Being able to cut the product in the field will save you time and money. Pipe available from 6" through 10'

Can be installed with minimum clearance to combustibles


Appliance connectors available for most equipment. Please refer to price guide

Typical Installations


Vertical Detail

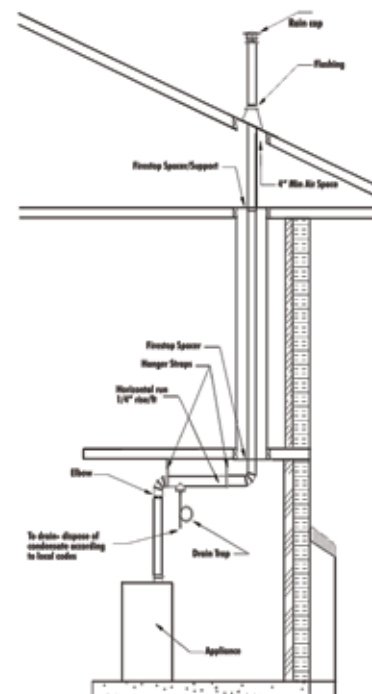

Side Wall Detail

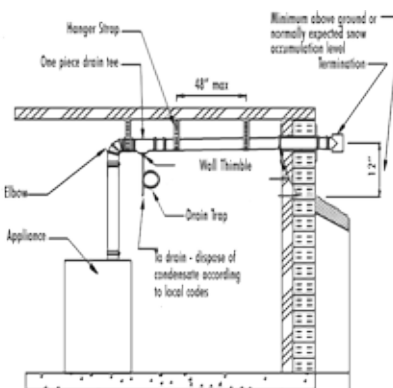

Joint Detail

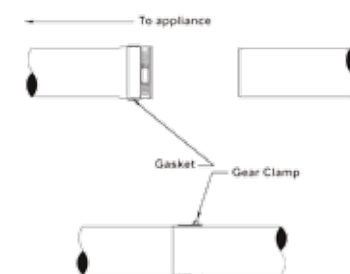

*All drawings are for illustrative purposes only. Please refer to guide for specific U.L. installation instructions. Always defer to local building codes.

** AL29-4C is a registered trademark of Allegheny Ludlum Steel Corporation

U.S.A.

20 Commerce Park North, Bedford, NH 03110-6911

Tel: 603.669.5136 1.800.654.5600 Fax: 1.888.889.3539

CANADA

452 Attwell Drive, Etobicoke, ON M9W 5C3

Tel: 416.679.0045 Fax: 416.679.0051

Z-FLEX
Chimney & Venting Solutions

Email: sales@z-flex.com

Web site: www.z-flex.com